



QUALITY AND FLEXIBILITY MAKE THE DIFFERENCE

If portable measurement technology inspires, then this is usually because HELIOS-PREISSER is behind it, and it is almost always the precision products that do the inspiring. Because over the years our brand has evolved into a hallmark of a comprehensive premium range, enabling our customers to work with extreme precision, even when it comes to extremely fine measurements. This is just the sort of challenge that we tackle on a day-to-day basis with maximum customer orientation right up to custom-made products if that's what it takes to meet your needs.

We have 130 team members at our Gammertingen facility in the state of Baden-Württemberg, in the southwest corner of Germany. The benefits? Short lead times, long-term availability and quick solutions when you need them urgently.

Quality, of course, is no. 1 here and it goes by the name of DIN EN ISO 9001. These strict requirements for certification apply to everything from our design to manufacturing processes, from procurement from suppliers to our marketing and distribution. And it's also important that our team members have their head in the game and share our philosophy: this ensures that we are your high-precision partner in all respects.



1. CHAPTER CALIPERS

14	Pocket vernier calipers
21	Pocket calipers / Tyre profile depth gauge
22	Measuring tool sets
23	Pocket calipers with dial
25	Digital pocket calipers
31	Digital pocket calipers for specific measuring tasks
37	Vernier workshop calipers
44	Workshop caliper with dial / Lightweight workshop calipers
45	Analogue caliper with cross points / gripper points
46	Digital workshop calipers
58	Contraction vernier calipers
60	Calipers for external locking grooves
61	Brake drum vernier calipers / Brake disc inspection gauges
62	Calipers for internal locking grooves
63	Calipers for 3/5 point measurement / for milling tool setting
64	Chamfer / Radius gauges
65	Gear tooth calipers
66	Vernier depth gauges
70	Digital depth gauges
76	Digital depth gauges with interchangeable inserts
80	Digital depth gauge for one-handed operation
81	Digital mounting scales
82	Wooden cases



0184 / 0185 Pocket vernier calipers



Specification

- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Inside cross points
- Low-set master scale
- Four way measurement
- Includes thread table


Shipment

- Imitation leather case

**DIN
862**



0184 501

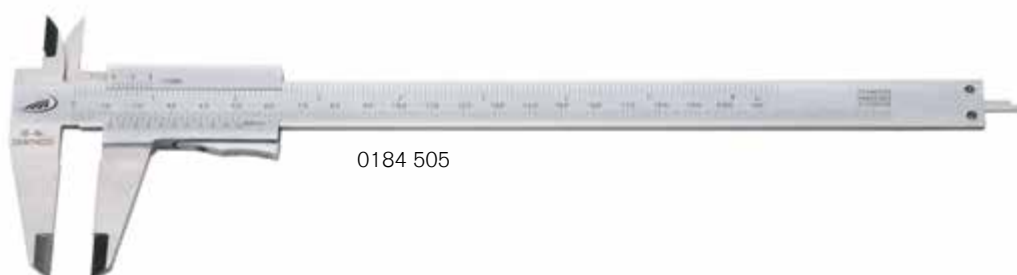

0184 505

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
With thumb clamp										
		150	6	40	1.57	0.05	1/128	rectangular	0184 501	23.20
		200	8	40	1.57	0.05	1/128	rectangular	0184 505	30.00
		300	12	50	1.57	0.05	1/128	without	0184 508	39.00



0185 501

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
With locking screw										
		100	4	30	1.18	0.05	-	rectangular	0185 500	18.50
		150	6	40	1.57	0.05	1/128	rectangular	0185 501	23.20
		200	8	40	1.57	0.05	1/128	rectangular	0185 505	30.00
		300	12	50	1.57	0.05	1/128	without	0185 508	39.00



HELIOS • PREISSER

0188 / 0189 Pocket vernier calipers



Specification


- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Inside cross points
- Low-set master scale
- Four way measurement
- Includes thread table

Shipment

- Imitation leather case

DIN
862

1

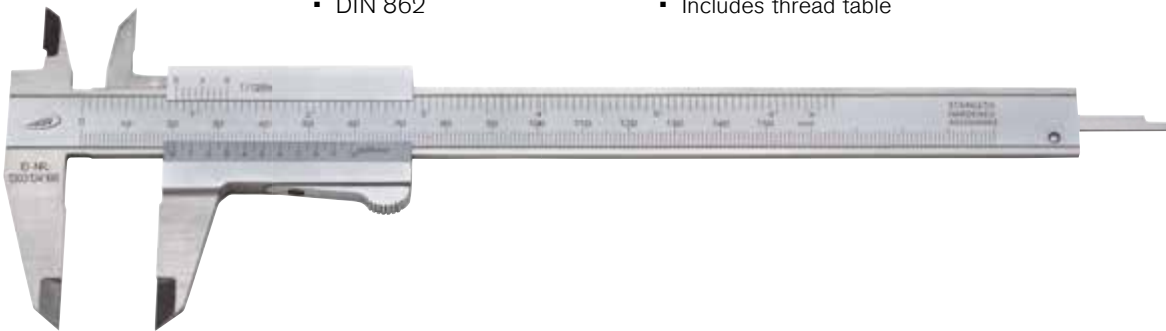

			Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
			mm	inch	mm	inch	mm	inch			
With thumb clamp			150	6	40	1.57	0.05	1/128	rectangular	0188 501	20.10



			Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
			mm	inch	mm	inch	mm	inch			
With locking screw			150	6	40	1.57	0.05	1/128	rectangular	0189 501	20.10



0194 / 0195 Pocket vernier calipers with round depth rod




Specification

- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Inside cross points
- Low-set master scale
- Four way measurement
- Includes thread table


Shipment

- Imitation leather case

**DIN
862**

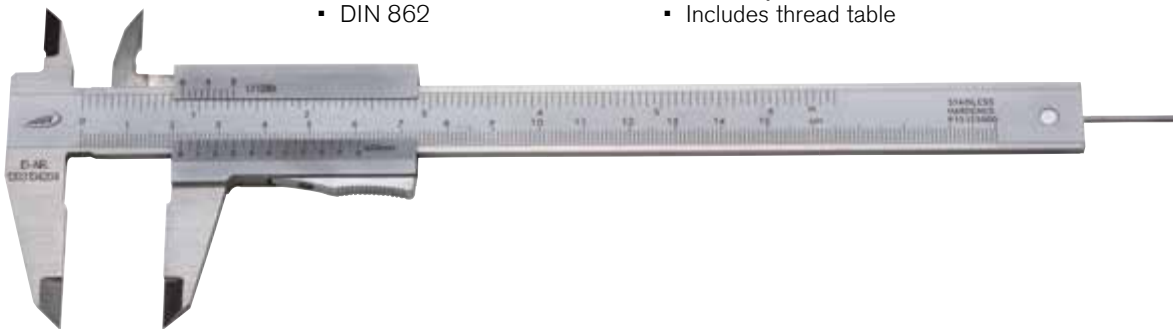

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
With thumb clamp										
		150	6	40	1.57	0.05	1/128	Ø 1.6 mm	0194 501	24.30

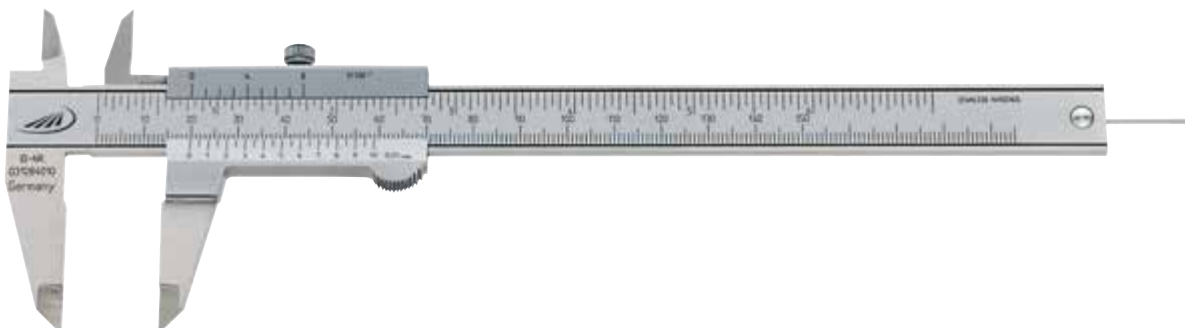

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
With locking screw										
		150	6	40	1.57	0.05	1/128	Ø 1.6 mm	0195 501	24.30



HELIOS • PREISSER

0196 Pocket vernier calipers with reading 0.02 mm



Specification


- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Inside cross points
- Main intervals are located deeper
- Four way measurement
- Includes thread table

Shipment

- Imitation leather case

**DIN
862**

1

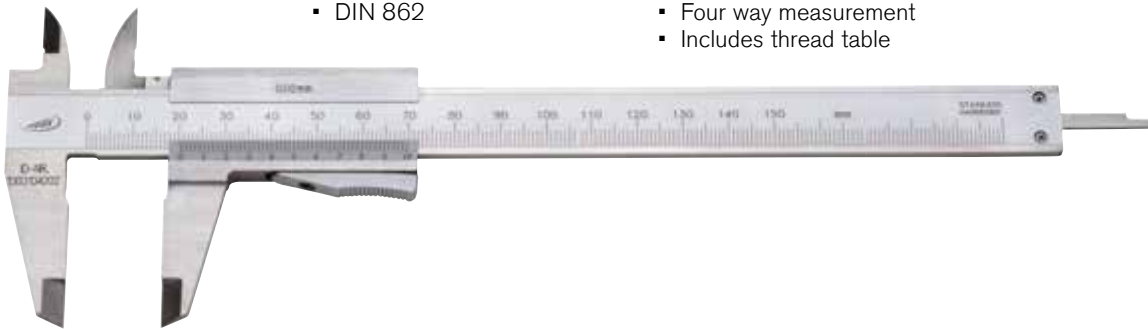

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
With thumb clamp										
		150	6	40	1.57	0,02	-	rectangular	0196 501 05	23.20



		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
With locking screw										
		150	6	40	1.57	0.02	1/1000	rectangular	0196 501 16	23.20



		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
With locking screw										
		200	8	40	1.57	0.02	1/1000	Ø 1.6 mm	0196 505 16	33.20



0198 / 0199 Pocket vernier calipers with parallax-free reading




Specification

- **Parallax-free reading**
- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Inside cross points
- Four way measurement
- Includes thread table

Shipment

- Imitation leather case

**DIN
862**

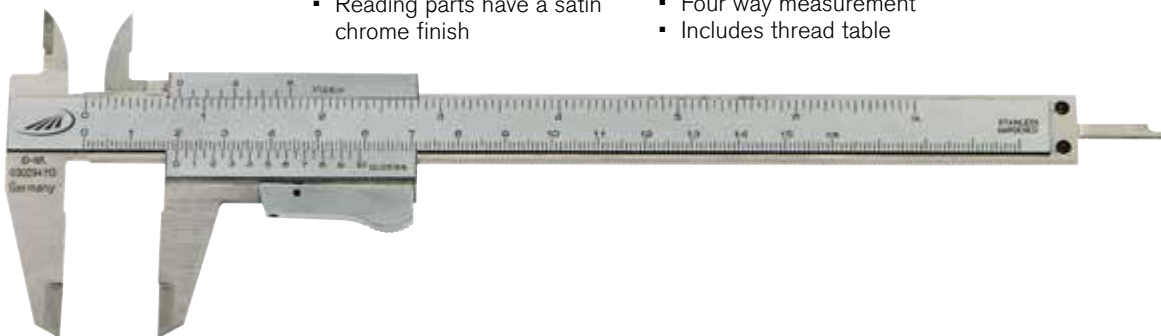

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
With thumb clamp										
		150	6	40	1.57	0.05	1/128	rectangular	0198 501	28.00




		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
With low-set locking screw										
		150	6	40	1.57	0.05	1/128	rectangular	0199 501	28.00



0203 Precision pocket vernier caliper PRISMA



DIN
862

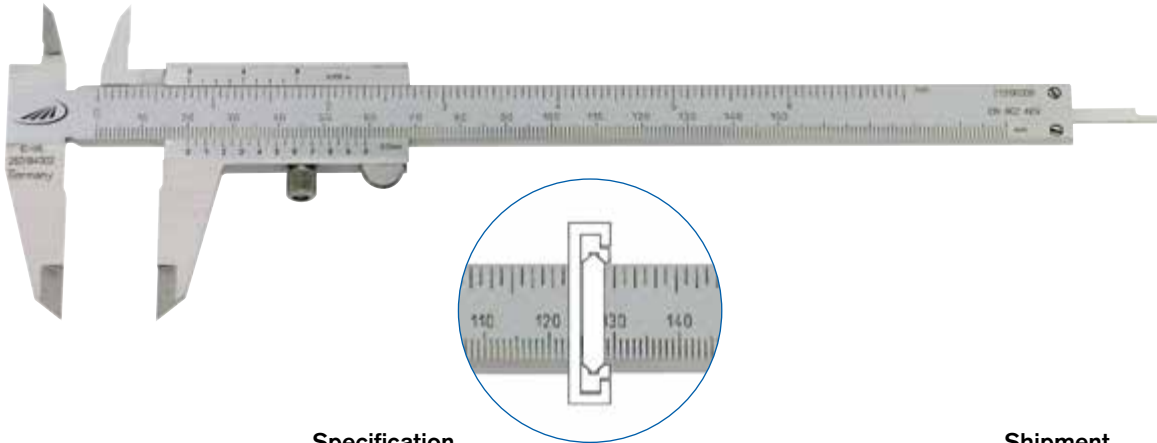

Specification

- Parallax-free reading
- Double prisma guide with excellent sliding characteristics
- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Low-set locking screw
- Inside cross points
- Four way measurement
- Includes thread table

Shipment


- Imitation leather case

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
		150	6	40	1.57	0.05	1/128	rectangular	0203 501	46.40

0190 Pocket vernier caliper DUO - FIX



DIN
862

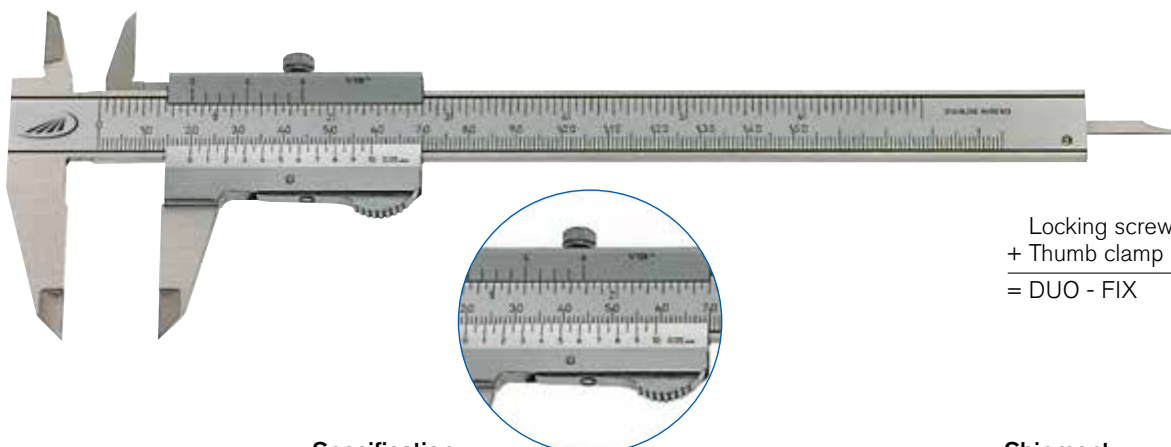

Locking screw
+ Thumb clamp
= DUO - FIX

Specification

- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Thumb clamp and locking screw
- Inside cross points
- Low-set master scale
- Four way measurement
- Includes thread table


Shipment

- Imitation leather case

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
		150	6	40	1.57	0.05	1/128	rectangular	0190 501	24.30



0182 Pocket vernier caliper for lefthanded

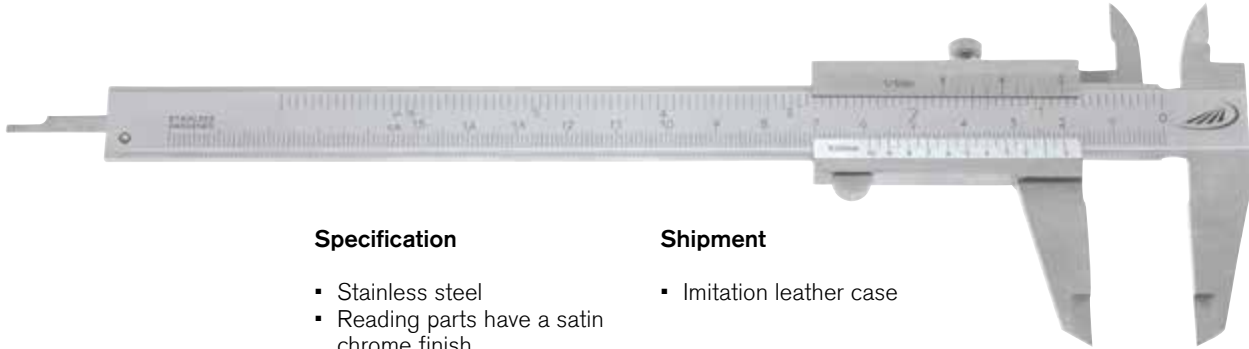

Specification

- Stainless steel
- Reading parts have a satin chrome finish
- Locking screw
- Factory standard

Shipment


- Imitation leather case

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No	List price Euro
		mm	inch	mm	inch	mm	inch			
With locking screw		150	6	40	1.57	0.05	1/128	rectangular	0182 516	32.00



HELIOS • PREISSER

0180 Pocket caliper

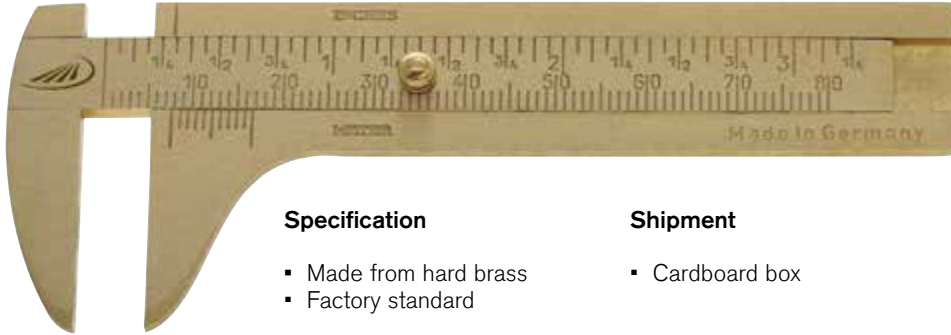

Specification


- Made from hard brass
- Factory standard

Shipment

- Cardboard box

		Measuring range		Jaw length		Reading		Ref. No	List price Euro
		mm	inch	mm	inch	mm	inch		
		100	6	25	1.00	0.1	1/16	0180 320	6.50

0180 Pocket caliper

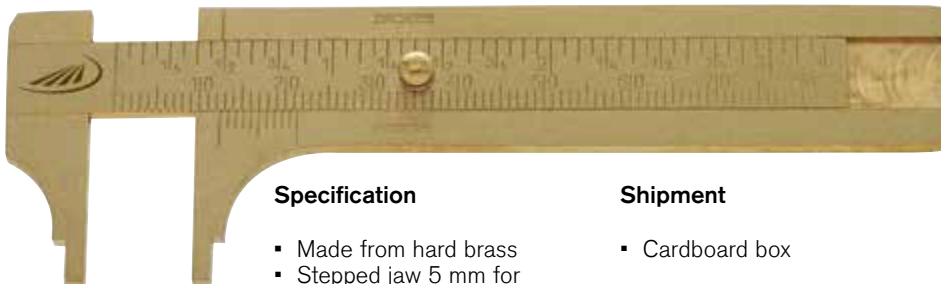

Specification

- Made from hard brass
- Stepped jaw 5 mm for internal measurement
- Factory standard

Shipment

- Cardboard box

		Measuring range		Jaw length		Reading		Ref. No	List price Euro
		mm	inch	mm	inch	mm	inch		
		100	6	25	1.00	0.1	1/16	0180 330	6.50

0180 Tyre profile depth gauge



Specification

- Made from hard brass
- Factory standard

Shipment

- Cardboard box

		Measuring range		Reading	Ref. No	List price Euro
		mm	inch	mm		
		30	1.18	0.1	0180 310	4.00



0212 Quality measuring tool set, 8 piece



Content

- Pocket calipers in 5 different types of choice
- External micrometer with carbide measuring faces, measuring range 0-25 mm, reading 0.01 mm
- Flexible steel rule, stainless steel, measuring range 200 mm, graduation mm / mm, 13 x 0.5 mm
- Knife square, hardened, DIN 875/00, 100 x 70 mm, with non-glare knife edge
- Knife edge, hardened and ground, DIN 874/00, length 100 mm
- Scriber, carbide tipped, hexagonal handle made of one piece, with pocket clip, length 180 mm
- Radius gauge, special steel, 17 sheets, concave and convex, with locking nut, measuring range 1.0 – 7.0 mm
- Screw pitch gauge, combined metric ISO- and Whitworth thread, 48 blades, increments 0.4 – 7.0 / 4 – 62

Shipment

- Wooden case

Choose between different calipers!

Set with DUO - FIX

Pocket vernier caliper

Measuring range 150 mm,
Reading 1/20mm und 1/128"

Set with DIGI-MET®

Pocket vernier caliper

Measuring range 150 mm,
Reading 0.01 mm / .0005 inch

Set with DIGI-MET®

Pocket vernier caliper IP 67

Measuring range 150 mm,
Reading 0.01 mm / .0005 inch

Depth gauge	Ref. No.	Set price Euro
rectangular	0212 520	123.00

Depth gauge	Ref. No.	Set price Euro
Ø 1.5 mm	0212 522	180.00
rectangular	0212 524	180.00

Depth gauge	Ref. No.	Set price Euro
Ø 1.5 mm	0212 526	205.00
rectangular	0212 528	205.00



1320 416
1320 417



1326 416
1326 417





HELIOS • PREISSER

0216 Dial calipers with long inside cross points



Specification

- Stainless steel
- Satin chrome scale
- Factory standard
- Locking screw

Shipment

- Inside cross points
- One pointer revolution = 10 mm
- Adjustable dial face
- Fitted case

		Measuring range		Jaw length		Length of cross points	Reading	Depth gauge	Ref. No.	List price
		mm	inch	mm	inch	mm	mm			Euro
		150	6	40	1.57	40	0.05	rectangular	0216 521	339.00

0217 / 0218 Dial calipers



**DIN
862**

Specification

- Stainless steel
- Satin chrome scale
- DIN 862
- Locking screw
- Inside cross points

Shipment

- One pointer revolution
with 0217 = 2 mm
with 0218 = 1 mm
- Four way measurement
- Fitted case

		Measuring range		Jaw length		Reading	Depth gauge	Ref. No.	List price
		mm	inch	mm	inch	mm			Euro
▪		150	6	40	1.57	0.02	rectangular	0217 501	63.00
		200	8	40	1.57	0.02	rectangular	0217 502	126.00
▪		150	6	40	1.57	0.01	rectangular	0218 501	84.00



DIGI-MET® QuickStart Electronic



QuickStart-Electronic with the QuickLock-Function for only one zero setting




All digital calipers with the **QuickStart-Electronic** also have the **QuickLock** Function. Only set the zero position once, zero position remains stored for all further measurements. When the **QuickLock** Function is activated a lock symbol appears in the display, this ensures that the zero position is protected against any operating error caused by accidental usage of the operating keys (keys are locked). The caliper is immediately ready for measurement; once the caliper is switched ON or the slide is moved, the display is automatically activated.

The need to reset to zero as with a conventional caliper once it is switched on is obsolete.

Conventional

- ① Switch ON
- ② Close the measuring jaws
- ③ Set to zero
- ④ Result of measurement

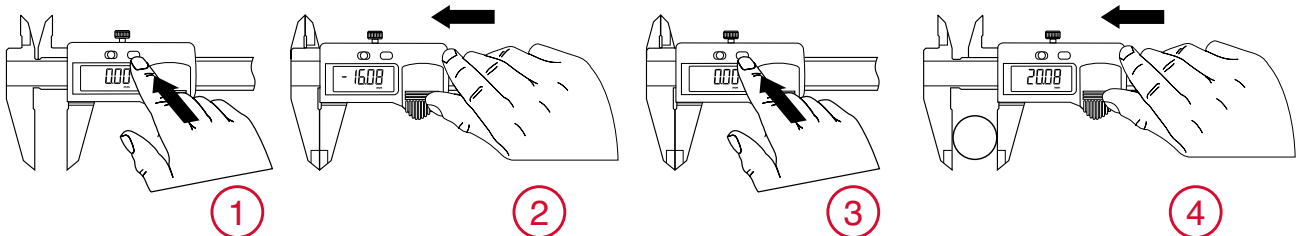

QuickStart Electronic




Press the ON key or move the slide

DIGI-MET® QuickLock Function



1. Set to zero
2. Activate the **QuickLock** Function

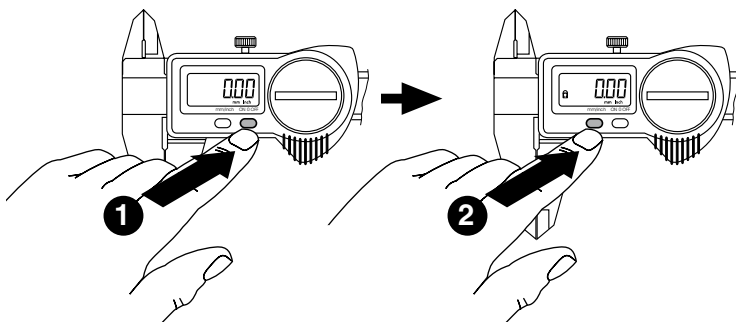

Advantages of the QuickLock Function

- The caliper is immediately ready for measurement
- Lock symbol appears in the display. This ensures that the zero position is protected against any operating error caused by accidental usage of the operating keys (keys are locked)



1320 DIGI-MET® Pocket calipers



1320 416



1



1320 517



Specification

- Inductive measuring system, resistant to damp and sweat
- Stainless steel
- LCD display 11 mm without data output, 7.5 mm with data output
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB

Shipment

- Plastic case, 1320 518 = Wooden case


		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
Without data output										
▪		150	6	40	1.57	0.01	.0005	Ø 1.5 mm	1320 416	105.00
▪		150	6	40	1.57	0.01	.0005	rectangular	1320 417	105.00
With DATA VARIABLE										
▪		150	6	40	1.57	0.01	.0005	Ø 1.5 mm	1320 516	137.00
▪		150	6	40	1.57	0.01	.0005	rectangular	1320 517	137.00
		200	8	50	1.97	0.01	.0005	rectangular	1320 519	172.00
		300	12	65	2.54	0.01	.0005	without	1320 522	221.00
With DATA VARIABLE, with long inside cross points										
		150	6	40	1.57	0.01	.0005	Ø 1.5 mm	1320 518	370.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1326 DIGI-MET® Pocket calipers IP67

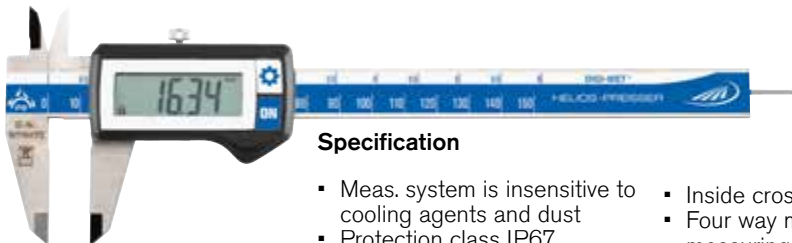

Specification

- Meas. system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- PRESET Function (setting a numerical value)

Shipment

- Plastic case

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
▪		150	6	40	1.57	0.01	.0005	Ø 1.5 mm	1326 416	152.00
▪		150	6	40	1.57	0.01	.0005	rectangular	1326 417	152.00
▪		200	8	50	2.00	0.01	.0005	rectangular	1326 418	211.00
▪		300	12	65	2.50	0.01	.0005	without	1326 422	267.00
With carbide tipped measuring jaws										
		150	6	40	1.57	0.01	.0005	Ø 1.5 mm	1326 914	317.00

Accessories

Battery, 3V-Lithium, CR 2032

Ref. No.

0220 704

List price Euro

3.60

1326 DIGI-MET® Pocket calipers IP67 with data output



Specification

- Protection class IP67
- Measuring system is insensitive to fluids and cooling agents
- Stainless steel
- LCD display 7.5 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB

Shipment

- Wooden case

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
▪		150	6	40	1.57	0.01	.0005	Ø 1.5 mm	1326 516	152.00
▪		150	6	40	1.57	0.01	.0005	rectangular	1326 517	152.00
▪		200	8	50	2.00	0.01	.0005	rectangular	1326 518	222.00
Accessories									Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032									0220 704	3.60
Cable for USB incl. software									1998 720	66.00
Cable for RS 232									1997 501	46.20
Cable for Digimatic									1998 501	59.00



1322 DIGI-MET® Pocket caliper PRISMA



1

Specification

- Double prisma guide with excellent sliding characteristics
- Protection class IP67
- Stainless steel
- DIN 862
- LCD display 7.5 mm
- Locking screw
- Inside cross points
- Four way measurement

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB

Shipment

- Wooden case

		Measuring range		Jaw length		Reading		Depth gauge	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
		150	6	40	1.57	0.01	.0005	Ø 1.5 mm	1322 516	195.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00

Depth attachment base





Specification

- Stainless steel
- Suitable for all pocket calipers
- Bridge length: 75 mm
- Dimensions: 75 x 6.5 mm

Shipment

- Cardboard box



	Ref. No.	List price Euro
Depth attachment base	0220 705	20.70



Connecting cables for DIGI-MET® instruments



1998 720



1997 501



1998 501



0996 701



0996 705

Note: detailed information regarding data cables, keyboard interfaces and wireless solutions see pages 270 and following

	Ref. No.	List price Euro
Cable for USB incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00
Cable for Opto to RS 232	0996 701	71.00
Cable for Opto to USB	0996 705	136.00

0145 Measuring tool set »Extensions«



Set consists of:

- Pair of measuring inserts with disc, disc dia. 6 / 10 / 12.5 mm
- Pair of measuring inserts with 60° cone, dia. 9 / 12 mm
- Pair of measuring inserts with cylindrical surfaces 1.5 mm
- Insert holder, right / left with thread M 2.5*
- Allen wrench SW 1.2 mm

Shipment

- Wooden case

	Ref. No.	List price Euro
Measuring tool set »Extensions«	0145 110	158.00



Measure distances
between bore holes



Measure grooves



Measure distances



Measure distances
between bore holes



Measure grooves

* further inserts see Ref No. 0710 pages 132 and following



1326 Universal pocket caliper "Pocket Talent"



Specification


- Stainless steel
- Protection class IP67
- Factory standard
- LCD display 7.5 mm
- Locking screw
- For internal and external measurements
- Individually adaptable on problematic tasks through measuring inserts with thread M 2.5
- Shipment in wooden case, incl. setting standard

Electronic functions


- ON/OFF switch
- QuickStart** Electronic
- QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment


- Wooden case
- * Includes pairs of measuring inserts
- Balls Ø 5.0 mm
- Planar surface Ø 4.8 mm




0710177*




0710161*



0710166



0710167



0710163

Application

*Standard shipment

The all-round talent which in conjunction with all common types of measuring inserts for indicators with a standard M 2.5 thread can be used for internal and external measurements. Therefore, the small universal caliper, "Pocket-Talent" offers you conduct numerous measurement applications.

		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		150	6	40	1.57	0.01	.0005	1326 932	339.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



Universal depth gauge with interchangeable inserts




**Measuring ranges
300 and 500 mm
See no. 1379 page 76**




1279 780*




1279 781




1279 782



1279 783



1279 784





1279 785

Universal caliper with exchangeable inserts



**Measuring ranges
300 and 500 mm
See no. 1348 page 56**

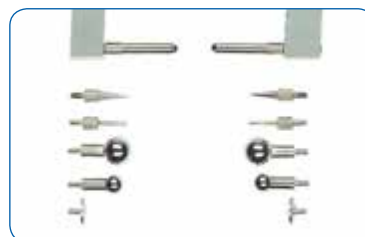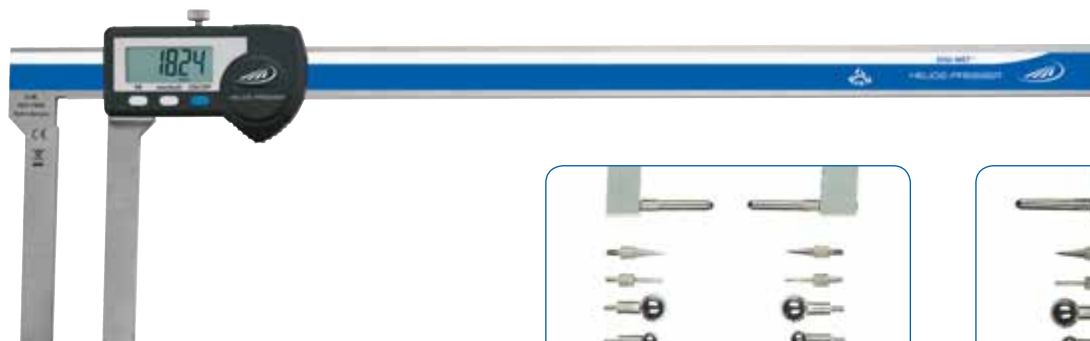

▪ for external measurements




▪ for internal measurements



1326 DIGI-MET® Pocket calipers for specific measuring tasks



1

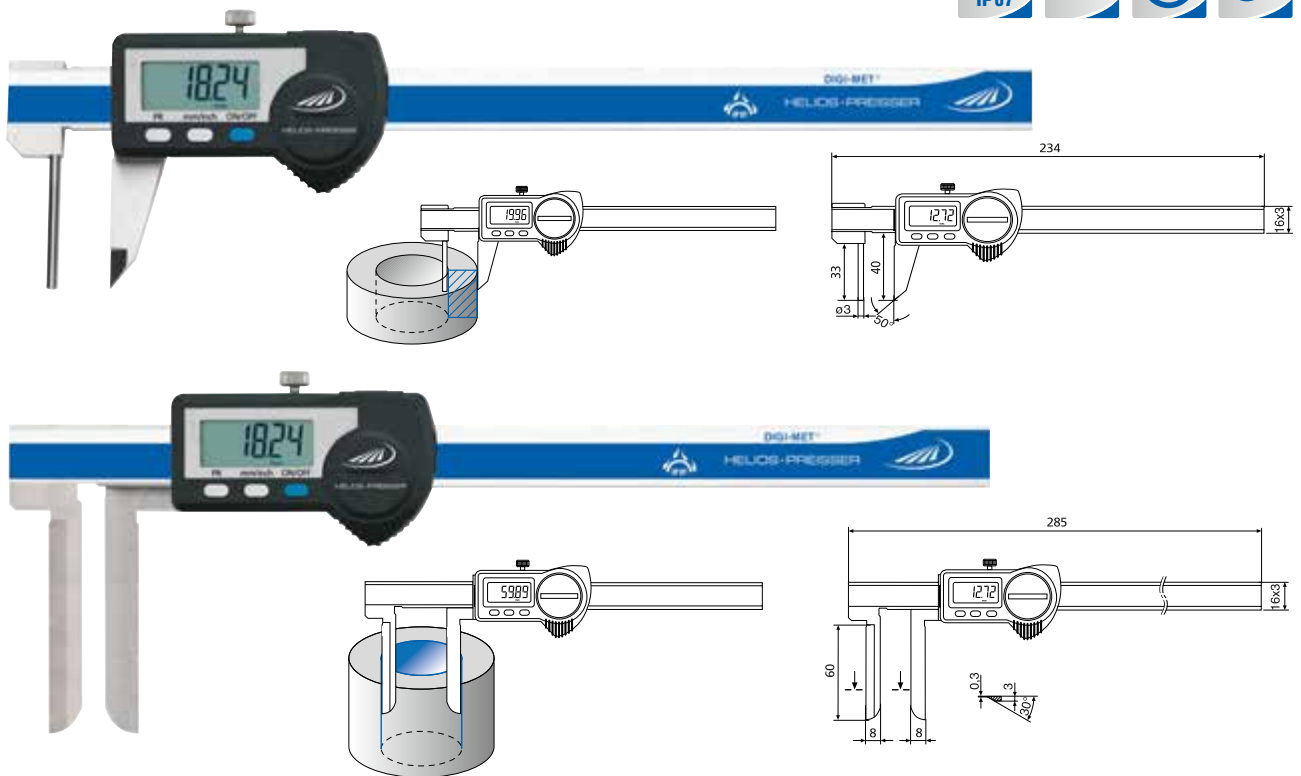

Specification

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust
- Housing and operating keys have an excellent chemical resistance
- Locking screw

Electronic functions

- ON/OFF switch
- QuickStart** Electronic
- QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output
RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Wall thickness pocket caliper									
		0 - 150	0 - 6	40	1.57	0.01	.0005	1326 918	465.00
With long narrow measuring jaws for internal measurements									
		10 - 200	4 - 8	60	2.36	0.01	.0005	1326 930	603.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1326 DIGI-MET® Pocket calipers for specific measuring tasks

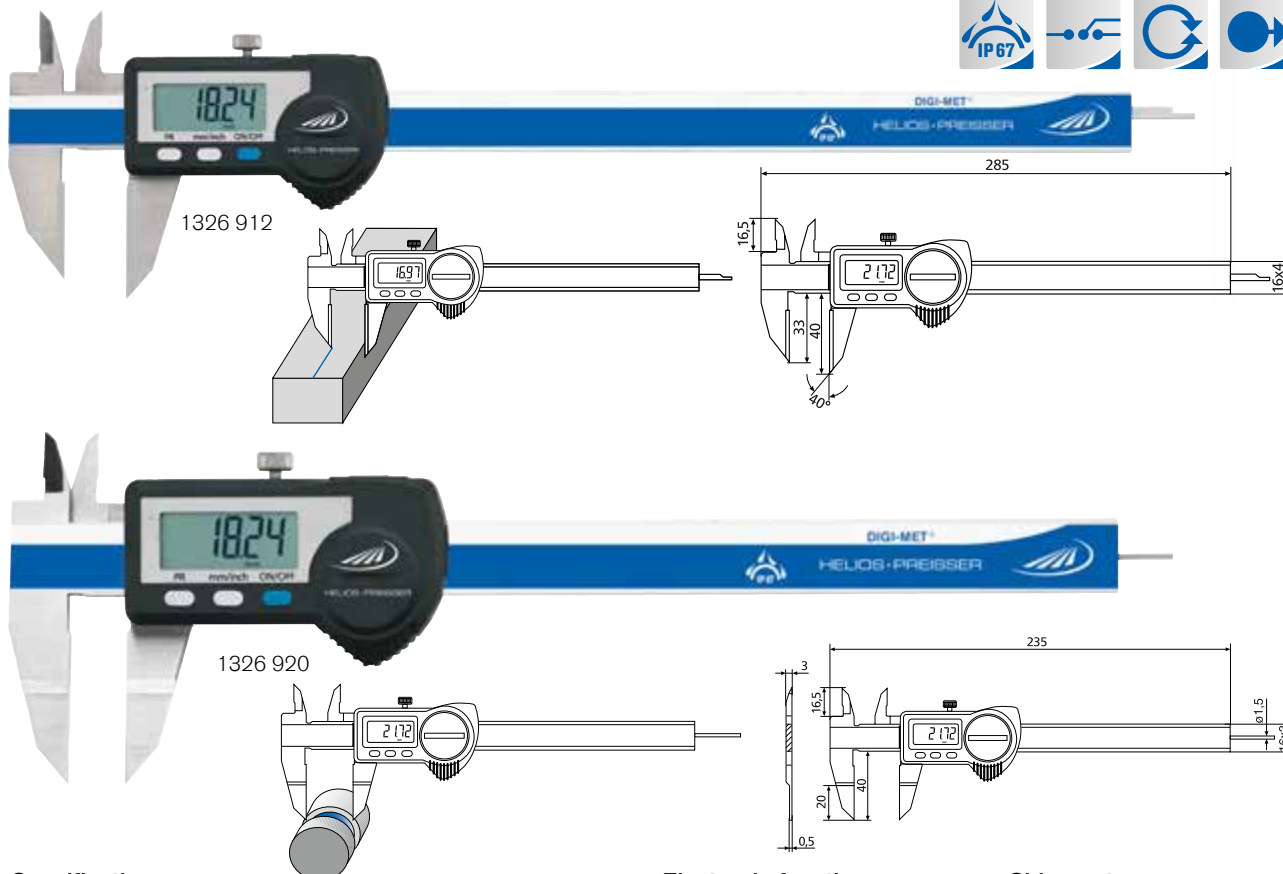

Specification

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case

		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Scribing / marking pocket caliper with carbide tipped measuring faces									
		200	8	33 / 40	1.29 / 1.57	0.01	.0005	1326 912	295.00
With flat measuring faces for external grooves									
		150	6	40	1.57	0.01	.0005	1326 920	503.00

Accessories



	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00




1326 DIGI-MET® Pocket calipers for specific measuring tasks



1326 916

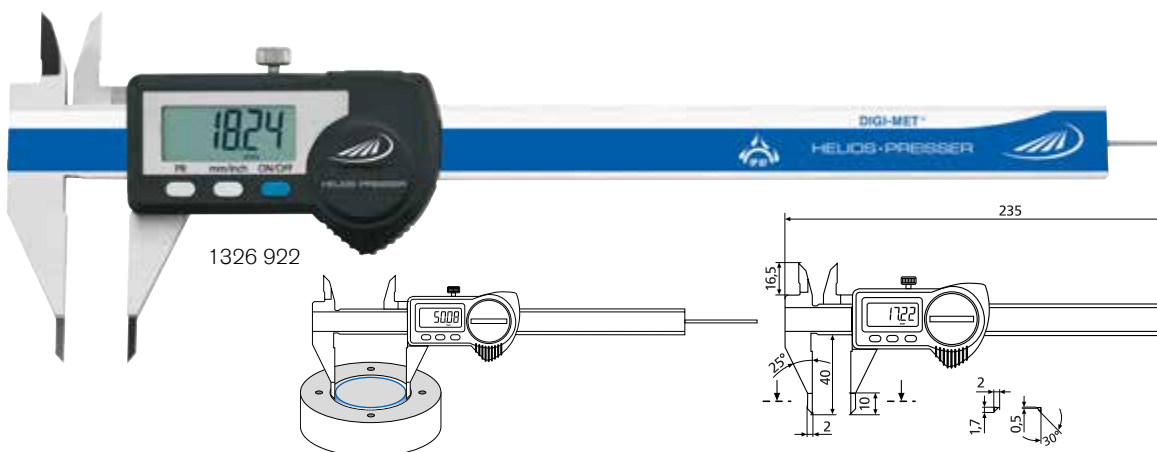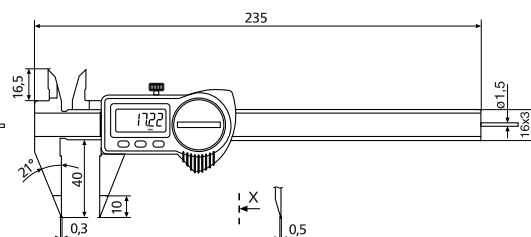

1326 922

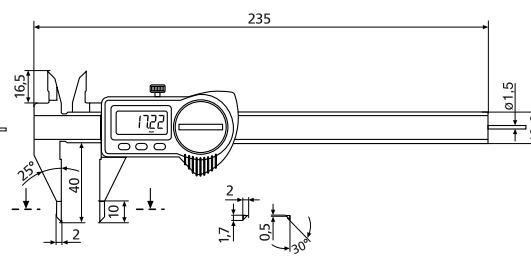

Specification

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
With pointed measuring jaws									
		150	6	40	1.57	0.01	.0005	1326 916	366.00
With precise measuring points									
		150	6	40	1.57	0.01	.0005	1326 922	413.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1326 DIGI-MET® Pocket calipers for specific measuring tasks

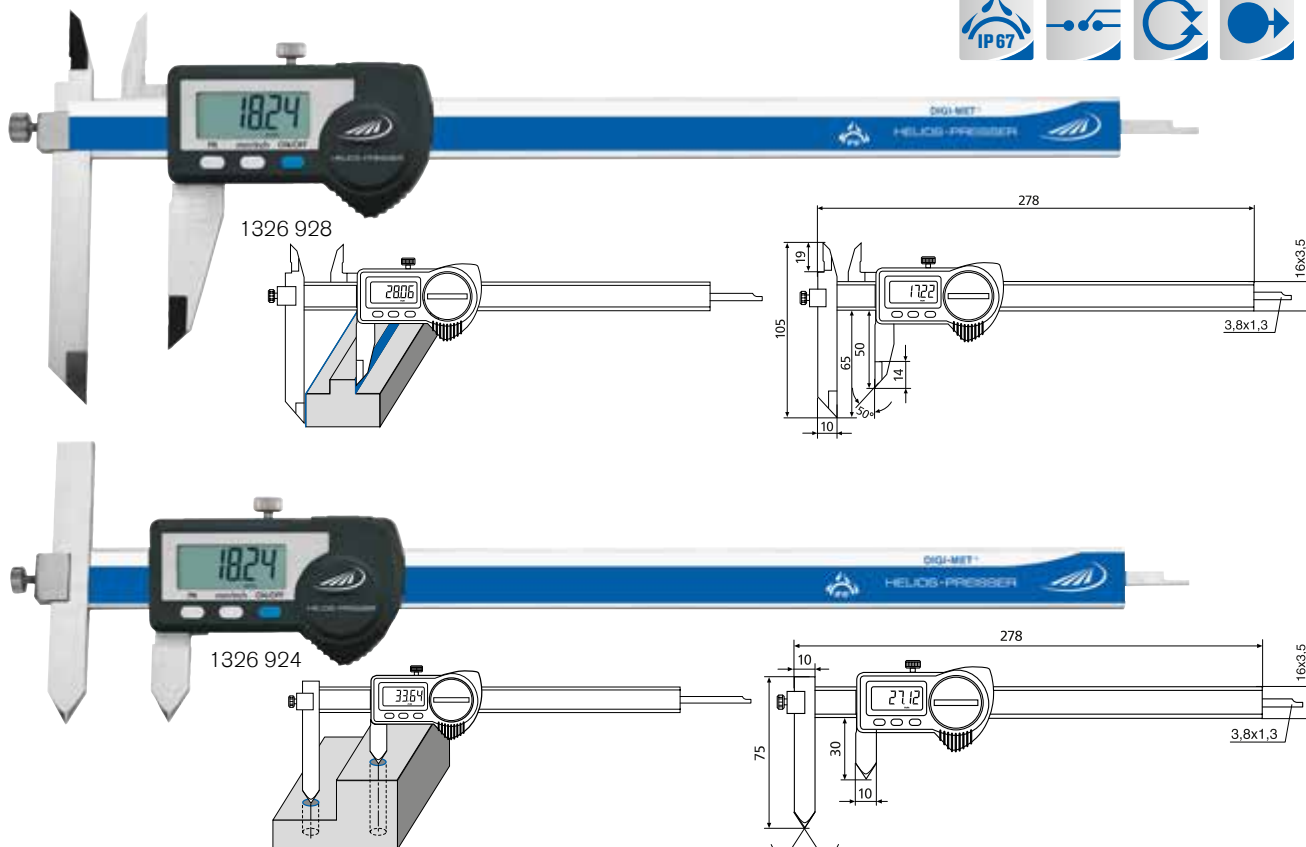

Specification

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust
- Housing and operating keys have an excellent chemical resistance
- Locking screw

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Offset type pocket caliper with adjustable measuring jaws + inside cross points									
		0 - 200	0 - 8	65 / 50	2.55 / 1.96	0.01	.0005	1326 928	440.00
Offset centerline pocket caliper with adjustable measuring jaws ideal for bore hole distance measurement									
		10 - 210	.4 - 8.3	75 / 30	2.95 / 1.18	0.01	.0005	1326 924	409.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1326 DIGI-MET® Pocket calipers for specific measuring tasks

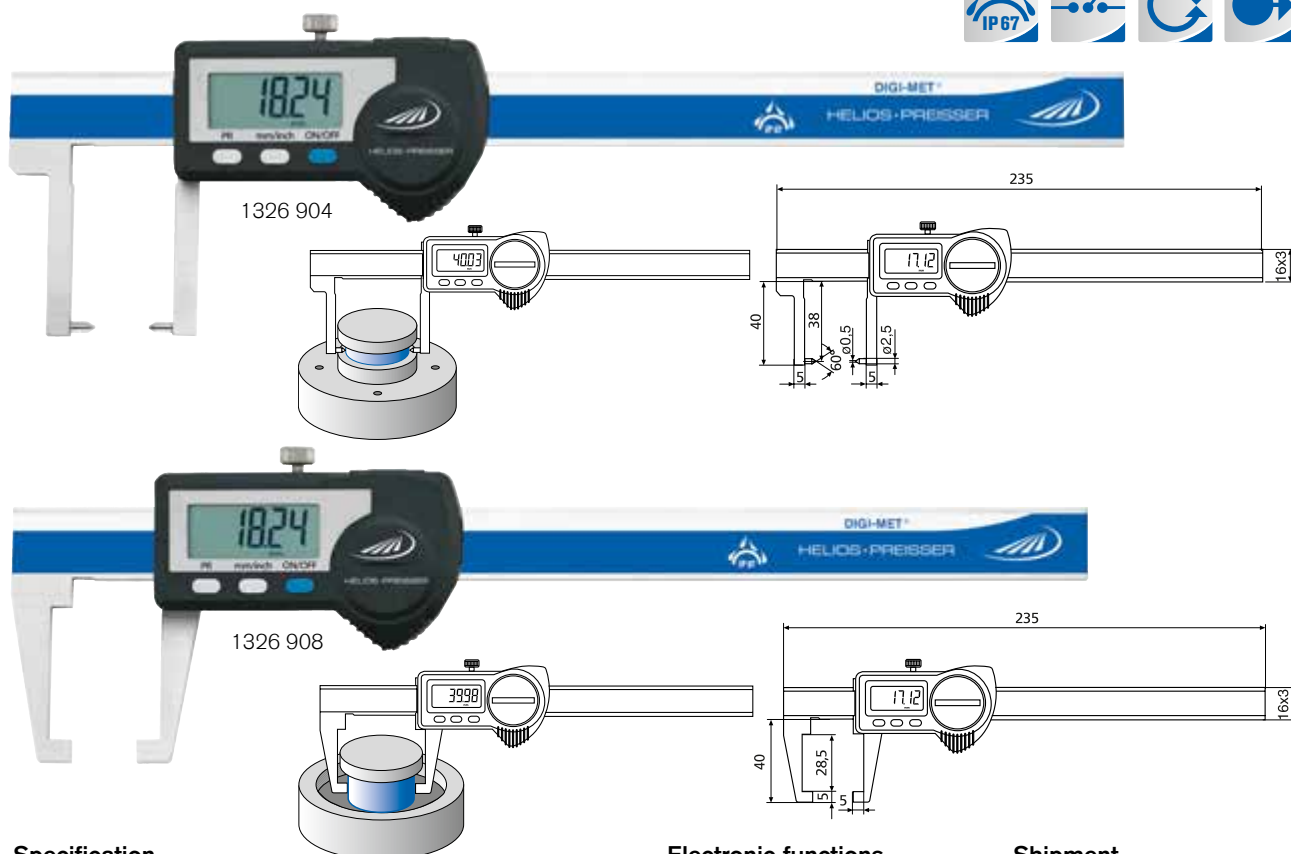

Specification

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust

- Housing and operating keys have an excellent chemical resistance
- Locking screw

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Inwardly angled anvils									
		150	6	40	1.57	0.01	.0005	1326 904	529.00
Inwardly angled measuring jaws									
		150	6	40	1.57	0.01	.0005	1326 908	451.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1326 DIGI-MET® Pocket calipers for specific measuring tasks

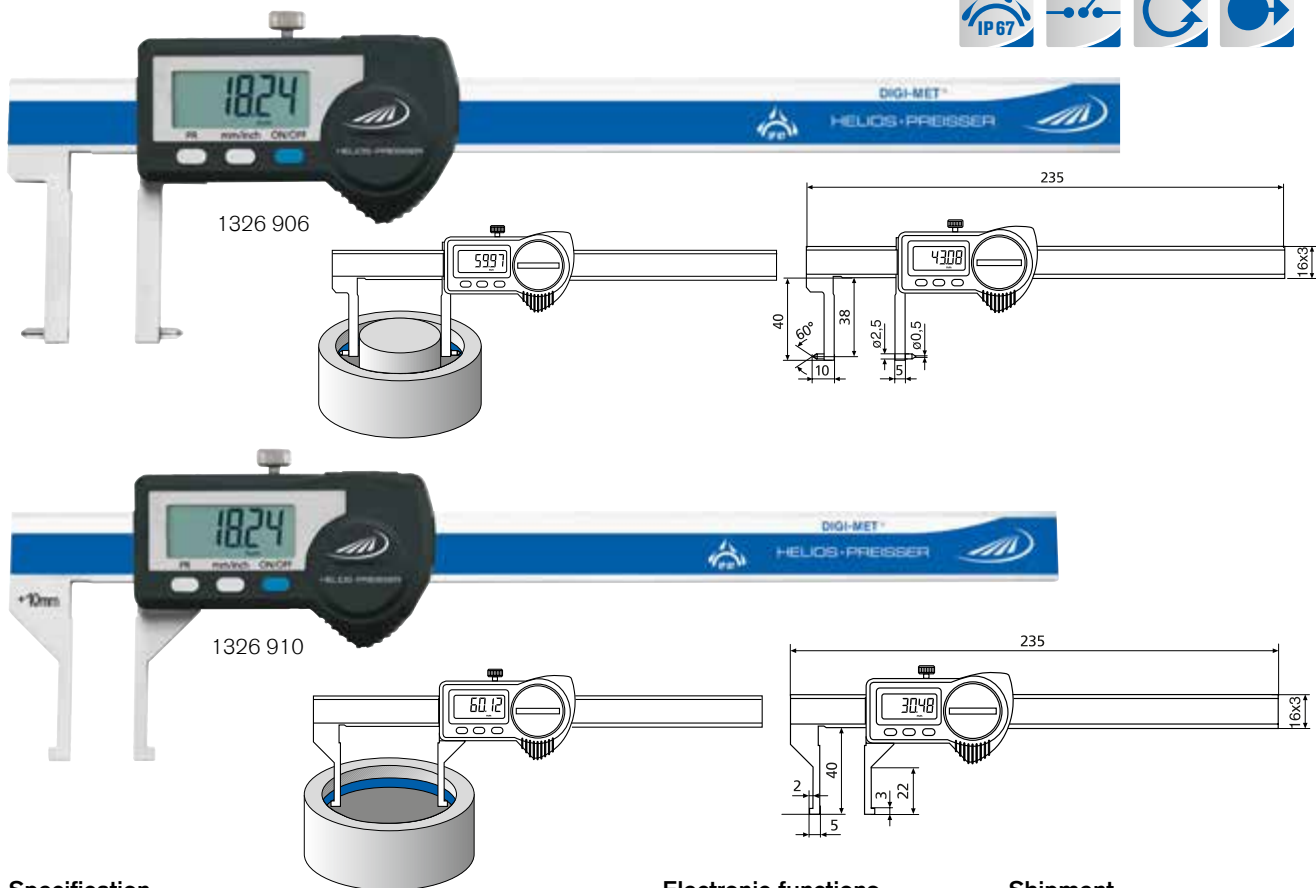

Specification

- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Measuring system is insensitive to cooling agents and dust
- Housing and operating keys have an excellent chemical resistance
- Locking screw

Electronic functions

- ON/OFF switch
- QuickStart** Electronic
- QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET** Function (setting a numerical value)

Shipment

- Wooden case

		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Outwardly angled anvils									
		20.5 - 170	.8 - 6.7	40	1.57	0.01	.0005	1326 906	525.00
Outwardly angled measuring jaws									
		10.5 - 160	.4 - 6.3	40	1.57	0.01	.0005	1326 910	519.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



HELIOS • PREISSER

0230 / 0231 Workshop calipers with parallax-free reading



Specification


- **Parallax-free reading**
- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Locking screw
- Knife points
- Stepped jaws for inside measurement: 10 mm, for measuring range 500 mm: 20 mm
- Direct reading of internal and external measurements
- High-precision laser graduation on the vernier and scale

Shipment

- Cardboard box

**DIN
862**

1

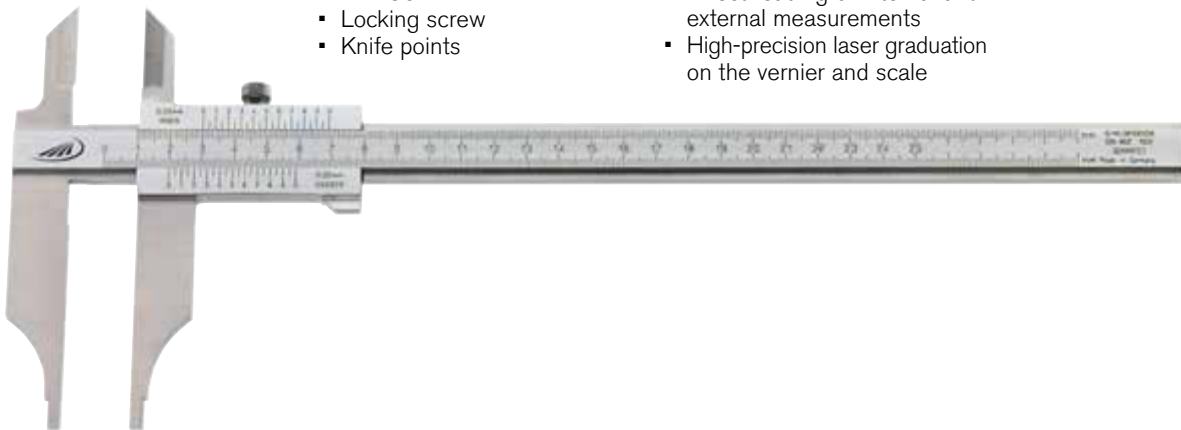

		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	mm		
Without fine adjustment									
▪		200	8	80	3.0	0.05	0.05	0230 501	135.00
▪		250	10	80	3.0	0.05	0.05	0230 502	150.00
▪		300	12	90	3.5	0.05	0.05	0230 503	165.00
		500	20	150	6.0	0.05	0.05	0230 508	471.00




		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	mm		
With fine adjustment									
▪		200	8	80	3.0	0.05	0.05	0231 501	160.00
▪		250	10	80	3.0	0.05	0.05	0231 502	175.00
▪		300	12	90	3.5	0.05	0.05	0231 503	190.00
		500	20	150	6.0	0.05	0.05	0231 508	515.00



0234 Workshop calipers



DIN
862

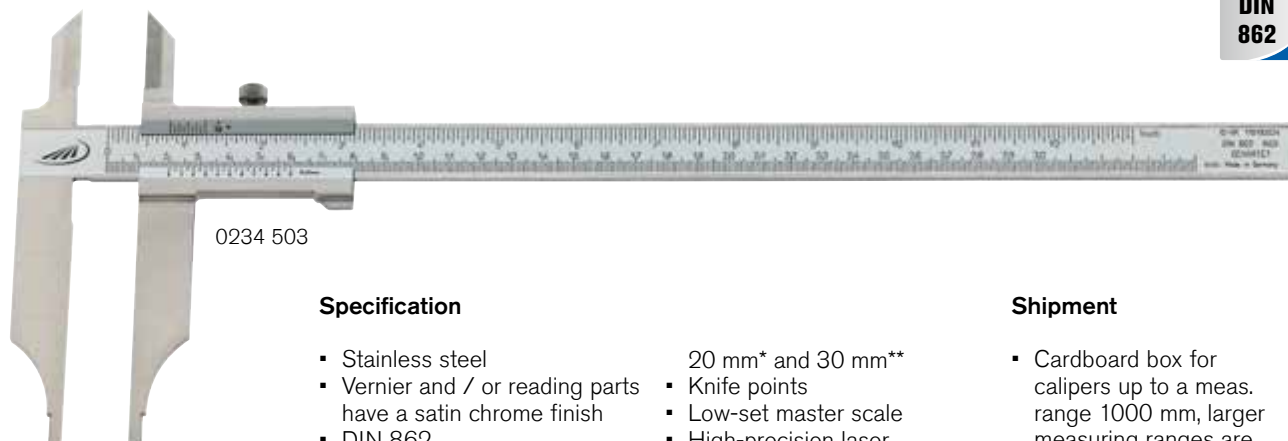

0234 503

Specification

- Stainless steel
- Vernier and / or reading parts have a satin chrome finish
- DIN 862
- Locking screw
- Stepped jaws for inside measurement: 10 mm,
- 20 mm* and 30 mm**
- Knife points
- Low-set master scale
- High-precision laser graduation on the vernier and scale

Shipment


- Cardboard box for calipers up to a meas. range 1000 mm, larger measuring ranges are individually packed

		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Vernier satin chrome finished									
▪		200	8	80	3.0	0.05	1/128	0234 201	101.00
▪		250	10	80	3.0	0.05	1/128	0234 202	123.00
▪		300	12	90	3.5	0.05	1/128	0234 203	132.00
▪		400	16	125	5.0	0.05		0234 205*	309.00
▪		500	20	150	6.0	0.05		0234 208*	387.00
▪		600	24	150	6.0	0.05		0234 211*	452.00
▪		800	31	150	6.0	0.05		0234 214*	515.00
▪		1000	39	150	6.0	0.05		0234 218*	625.00
	▪	1250	49	200	8.0	0.05		0234 222**	999.00
	▪	1500	59	200	8.0	0.05		0234 224**	1,292.00
	▪	2000	79	200	8.0	0.05		0234 226**	1,886.00
Vernier + scale satin chrome finished									
▪		200	8	80	3.0	0.05	1/128	0234 501	119.00
▪		250	10	80	3.0	0.05	1/128	0234 502	138.00
▪		300	12	90	3.5	0.05	1/128	0234 503	151.00
▪		400	16	125	5.0	0.05		0234 505*	350.00
▪		500	20	150	6.0	0.05		0234 508*	451.00
▪		600	24	150	6.0	0.05		0234 511*	512.00
▪		800	31	150	6.0	0.05		0234 514*	580.00
▪		1000	39	150	6.0	0.05		0234 518*	697.00
	▪	1250	49	200	8.0	0.05		0234 522**	1,138.00
	▪	1500	59	200	8.0	0.05		0234 524**	1,464.00
	▪	2000	79	200	8.0	0.05		0234 526**	2,143.00

0235 Workshop calipers



**DIN
862**

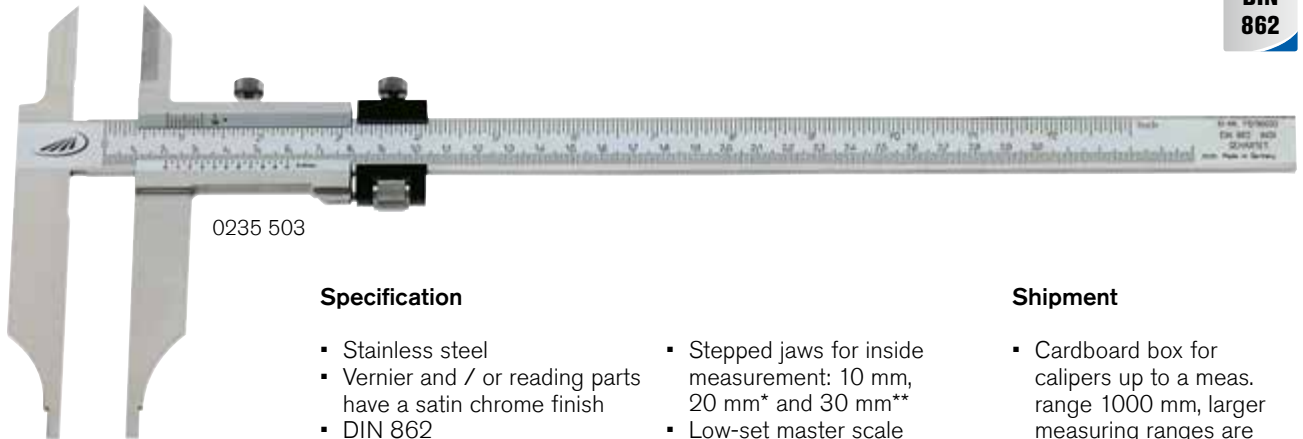

0235 503

Specification

- Stainless steel
- Vernier and / or reading parts have a satin chrome finish
- DIN 862
- Locking screw
- Knife points
- Fine adjustment
- Stepped jaws for inside measurement: 10 mm, 20 mm* and 30 mm**
- Low-set master scale
- High-precision laser graduation on the vernier and scale

Shipment

- Cardboard box for calipers up to a meas. range 1000 mm, larger measuring ranges are individually packed


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Vernier satin chrome finished									
▪		200	8	80	3.0	0.05	1/128	0235 201	127.00
▪		250	10	80	3.0	0.05	1/128	0235 202	147.00
▪		300	12	90	3.5	0.05	1/128	0235 203	155.00
▪		400	16	125	5.0	0.05		0235 205*	357.00
▪		500	20	150	6.0	0.05		0235 208*	435.00
▪		600	24	150	6.0	0.05		0235 211*	499.00
▪		800	31	150	6.0	0.05		0235 214*	572.00
▪		1000	39	150	6.0	0.05		0235 218*	666.00
	▪	1250	49	200	8.0	0.05		0235 222**	1,093.00
	▪	1500	59	200	8.0	0.05		0235 224**	1,381.00
	▪	2000	79	200	8.0	0.05		0235 226**	2,039.00
Vernier + scale satin chrome finished									
▪		200	8	80	3.0	0.05	1/128	0235 501	136.00
▪		250	10	80	3.0	0.05	1/128	0235 502	163.00
▪		300	12	90	3.5	0.05	1/128	0235 503	174.00
▪		400	16	125	5.0	0.05		0235 505*	397.00
▪		500	20	150	6.0	0.05		0235 508*	488.00
▪		600	24	150	6.0	0.05		0235 511*	555.00
▪		800	31	150	6.0	0.05		0235 514*	639.00
▪		1000	39	150	6.0	0.05		0235 518*	755.00
	▪	1250	49	200	8.0	0.05		0235 522**	1,220.00
	▪	1500	59	200	8.0	0.05		0235 524**	1,552.00
	▪	2000	79	200	8.0	0.05		0235 526**	2,287.00



0236 Workshop calipers



DIN
862

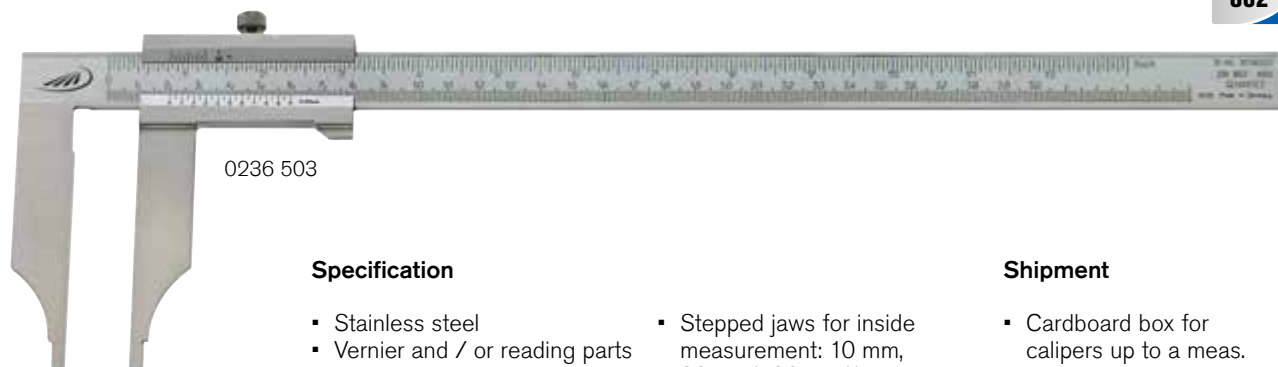

0236 503

Specification

- Stainless steel
- Vernier and / or reading parts have a satin chrome finish
- DIN 862
- Locking screw
- Low-set master scale
- Stepped jaws for inside measurement: 10 mm, 20 mm*, 30 mm** and 50 mm (0236 230)
- High-precision laser graduation on the vernier and scale

Shipment

- Cardboard box for calipers up to a meas. range 1000 mm, larger measuring ranges are individually packed


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Vernier satin chrome finished									
▪		200	8	80	3.0	0.05	1/128	0236 201	87.00
▪		250	10	80	3.0	0.05	1/128	0236 202	106.00
▪		300	12	90	3.5	0.05	1/128	0236 203	119.00
▪		400	16	125	5.0	0.05		0236 205*	244.00
▪		500	20	150	6.0	0.05		0236 208*	322.00
▪		600	24	150	6.0	0.05		0236 211*	386.00
▪		800	31	150	6.0	0.05		0236 214*	412.00
▪		1000	39	150	6.0	0.05		0236 218*	515.00
	▪	1250	49	200	8.0	0.05		0236 222**	797.00
	▪	1500	59	200	8.0	0.05		0236 224**	1,087.00
	▪	2000	79	200	8.0	0.05		0236 226**	1,498.00
	▪	3000***	118	200	8.0	0.05		0236 230	2,477.00
Vernier + scale satin chrome finished									
▪		200	8	80	3.0	0.05	1/128	0236 501	99.00
▪		250	10	80	3.0	0.05	1/128	0236 502	125.00
▪		300	12	90	3.5	0.05	1/128	0236 503	135.00
▪		400	16	125	5.0	0.05		0236 505*	286.00
▪		500	20	150	6.0	0.05		0236 508*	376.00
▪		600	24	150	6.0	0.05		0236 511*	449.00
▪		800	31	150	6.0	0.05		0236 514*	466.00
▪		1000	39	150	6.0	0.05		0236 518*	581.00
	▪	1250	49	200	8.0	0.05		0236 522**	955.00
	▪	1500	59	200	8.0	0.05		0236 524**	1,281.00
	▪	2000	79	200	8.0	0.05		0236 526**	1,931.00

*** = Factory standard





0236 Workshop calipers with long measuring jaws

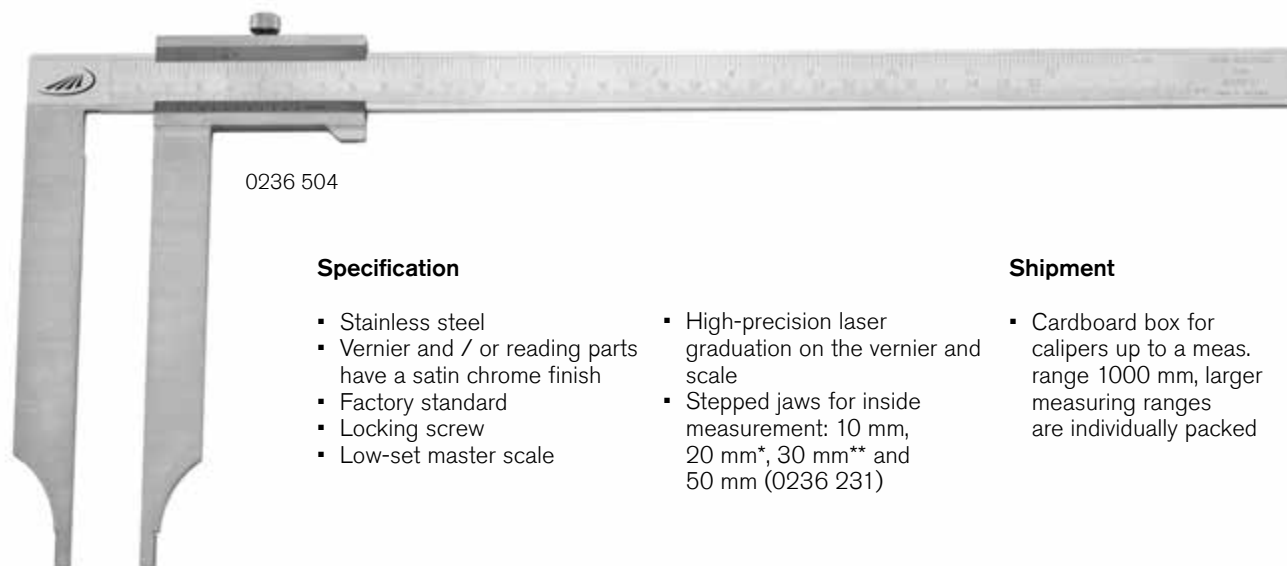

0236 504

Specification

- Stainless steel
- Vernier and / or reading parts have a satin chrome finish
- Factory standard
- Locking screw
- Low-set master scale
- High-precision laser graduation on the vernier and scale
- Stepped jaws for inside measurement: 10 mm, 20 mm*, 30 mm** and 50 mm (0236 231)

Shipment

- Cardboard box for calipers up to a meas. range 1000 mm, larger measuring ranges are individually packed


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Vernier satin chrome finished									
		300	12	150	6.0	0.05	1/128	0236 204	221.00
		400	16	150	5.0	0.05		0236 206*	315.00
		400	16	200	8.0	0.05		0236 207*	384.00
		500	20	200	8.0	0.05		0236 209*	427.00
		500	20	250	10.0	0.05		0236 210*	515.00
		600	24	200	8.0	0.05		0236 212*	536.00
		600	24	300	12.0	0.05		0236 213*	659.00
		800	31	200	8.0	0.05		0236 215*	620.00
		800	31	300	12.0	0.05		0236 216*	793.00
		800	31	400	16.0	0.05		0236 217*	921.00
		1000	39	200	8.0	0.05		0236 219*	761.00
		1000	39	300	12.0	0.05		0236 220*	850.00
		1000	39	500	20.0	0.05		0236 221*	1,281.00
	▪	1500	59	300	12.0	0.05		0236 225**	1,314.00
	▪	2000	79	300	12.0	0.05		0236 227**	1,828.00
	▪	3000	118	300	12.0	0.05		0236 231	3,021.00
Vernier + scale satin chrome finished									
		300	12	150	6.0	0.05	1/128	0236 504	239.00
		400	16	150	6.0	0.05		0236 506*	367.00
		400	16	200	8.0	0.05		0236 507*	446.00
		500	20	200	8.0	0.05		0236 509*	495.00
		500	20	250	10.0	0.05		0236 510*	591.00
		600	24	200	8.0	0.05		0236 512*	559.00
		600	24	300	12.0	0.05		0236 513*	728.00
		800	31	200	8.0	0.05		0236 515*	720.00
		800	31	300	12.0	0.05		0236 516*	918.00
		800	31	400	16.0	0.05		0236 517*	1,077.00
		1000	39	200	8.0	0.05		0236 519*	883.00
		1000	39	300	12.0	0.05		0236 520*	1,114.00
		1000	39	500	20.0	0.05		0236 521*	1,522.00
	▪	1500	59	300	12.0	0.05		0236 525**	1,563.00
	▪	2000	79	300	12.0	0.05		0236 527**	2,315.00



0237 Workshop calipers



DIN
862

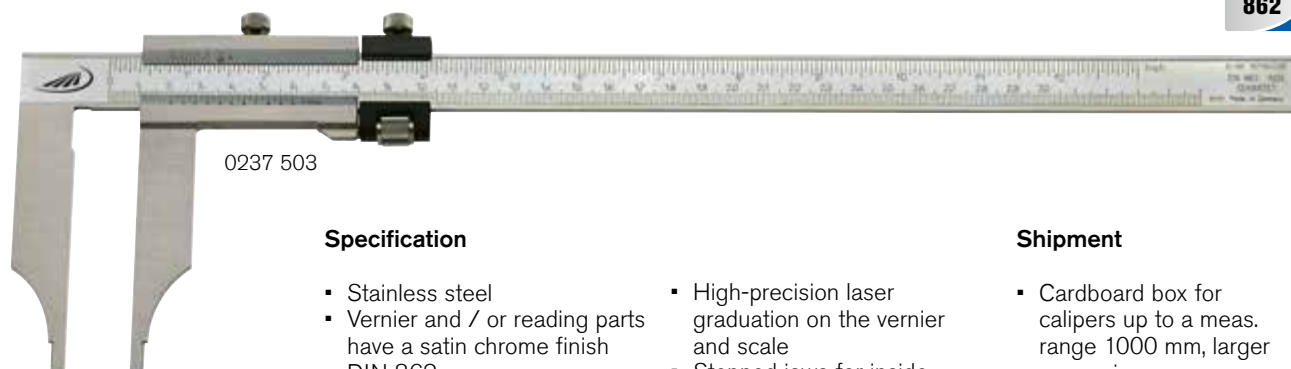

0237 503

Specification

- Stainless steel
- Vernier and / or reading parts have a satin chrome finish
- DIN 862
- Locking screw
- Fine adjustment
- Low-set master scale
- High-precision laser graduation on the vernier and scale
- Stepped jaws for inside measurement: 10 mm, 20 mm*, 30 mm** and 50 mm (0237 230)

Shipment

- Cardboard box for calipers up to a meas. range 1000 mm, larger measuring ranges are individually packed


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Vernier satin chrome finished									
▪		200	8	80	3.0	0.05	1/128	0237 201	112.00
▪		250	10	80	3.0	0.05	1/128	0237 202	132.00
▪		300	12	90	3.5	0.05	1/128	0237 203	144.00
▪		400	16	125	5.0	0.05		0237 205*	293.00
▪		500	20	150	6.0	0.05		0237 208*	372.00
▪		600	24	150	6.0	0.05		0237 211*	435.00
▪		800	31	150	6.0	0.05		0237 214*	469.00
▪		1000	39	150	6.0	0.05		0237 218*	572.00
	▪	1250	49	200	8.0	0.05		0237 222**	887.00
	▪	1500	59	200	8.0	0.05		0237 224**	1,178.00
	▪	2000	79	200	8.0	0.05		0237 226**	1,646.00
	▪	3000***	118	200	8.0	0.05		0237 230	2,692.00
Vernier + scale satin chrome finished									
▪		200	8	80	3.0	0.05	1/128	0237 501	122.00
▪		250	10	80	3.0	0.05	1/128	0237 502	149.00
▪		300	12	90	3.5	0.05	1/128	0237 503	161.00
▪		400	16	125	5.0	0.05		0237 505*	334.00
▪		500	20	150	6.0	0.05		0237 508*	423.00
▪		600	24	150	6.0	0.05		0237 511*	495.00
▪		800	31	150	6.0	0.05		0237 514*	524.00
▪		1000	39	150	6.0	0.05		0237 518*	640.00
	▪	1250	49	200	8.0	0.05		0237 522**	1,042.00
	▪	1500	59	200	8.0	0.05		0237 524**	1,371.00
	▪	2000	79	200	8.0	0.05		0237 526**	2,077.00

*** = Factory standard





0237 Workshop calipers with long measuring jaws

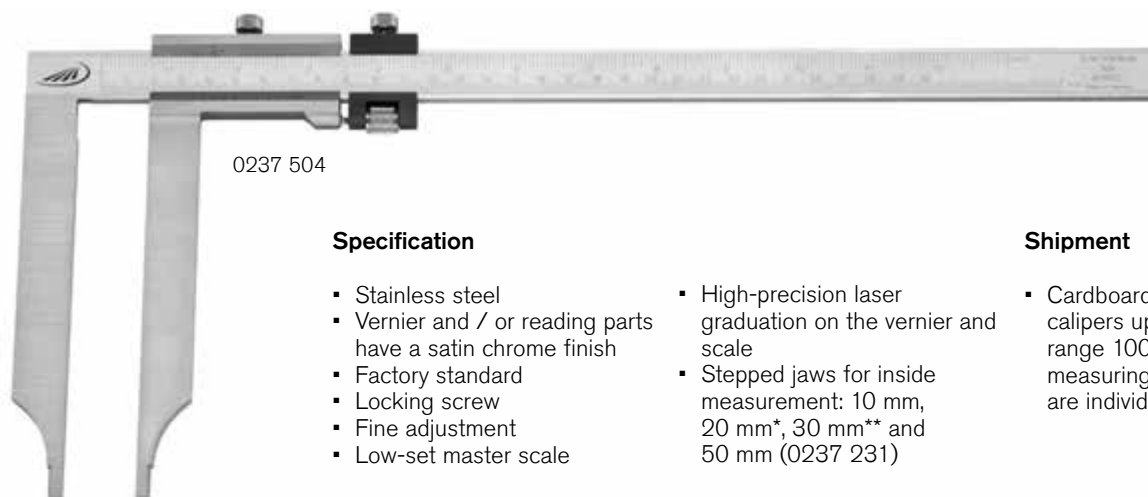

0237 504

Specification

- Stainless steel
- Vernier and / or reading parts have a satin chrome finish
- Factory standard
- Locking screw
- Fine adjustment
- Low-set master scale
- High-precision laser graduation on the vernier and scale
- Stepped jaws for inside measurement: 10 mm, 20 mm*, 30 mm** and 50 mm (0237 231)

Shipment

- Cardboard box for calipers up to a meas. range 1000 mm, larger measuring ranges are individually packed


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
Vernier satin chrome finished									
		300	12	150	6.0	0.05	1/128	0237 204	245.00
		400	16	150	6.0	0.05		0237 206*	363.00
		400	16	200	8.0	0.05		0237 207*	433.00
		500	20	200	8.0	0.05		0237 209*	477.00
		500	20	250	10.0	0.05		0237 210*	563.00
		600	24	200	8.0	0.05		0237 212*	582.00
		600	24	300	12.0	0.05		0237 213*	708.00
		800	31	200	8.0	0.05		0237 215*	680.00
		800	31	300	12.0	0.05		0237 216*	852.00
		800	31	400	16.0	0.05		0237 217*	981.00
		1000	39	200	8.0	0.05		0237 219*	822.00
		1000	39	300	12.0	0.05		0237 220*	910.00
		1000	39	500	20.0	0.05		0237 221*	1,340.00
	▪	1500	59	300	12.0	0.05		0237 225**	1,405.00
	▪	2000	79	300	12.0	0.05		0237 227**	1,975.00
	▪	3000	118	300	12.0	0.05		0237 231	3,235.00
Vernier + scale satin chrome finished									
		300	12	150	6.0	0.05	1/128	0237 504	262.00
		400	16	150	6.0	0.05		0237 506*	414.00
		400	16	200	8.0	0.05		0237 507*	493.00
		500	20	200	8.0	0.05		0237 509*	541.00
		500	20	250	10.0	0.05		0237 510*	638.00
		600	24	200	8.0	0.05		0237 512*	651.00
		600	24	300	12.0	0.05		0237 513*	777.00
		800	31	200	8.0	0.05		0237 515*	779.00
		800	31	300	12.0	0.05		0237 516*	974.00
		800	31	400	16.0	0.05		0237 517*	1,137.00
		1000	39	200	8.0	0.05		0237 519*	938.00
		1000	39	300	12.0	0.05		0237 520*	1,172.00
		1000	39	500	20.0	0.05		0237 521*	1,582.00
	▪	1500	59	300	12.0	0.05		0237 525**	1,655.00
	▪	2000	79	300	12.0	0.05		0237 527**	2,460.00



0219 Workshop dial calipers



DIN
862

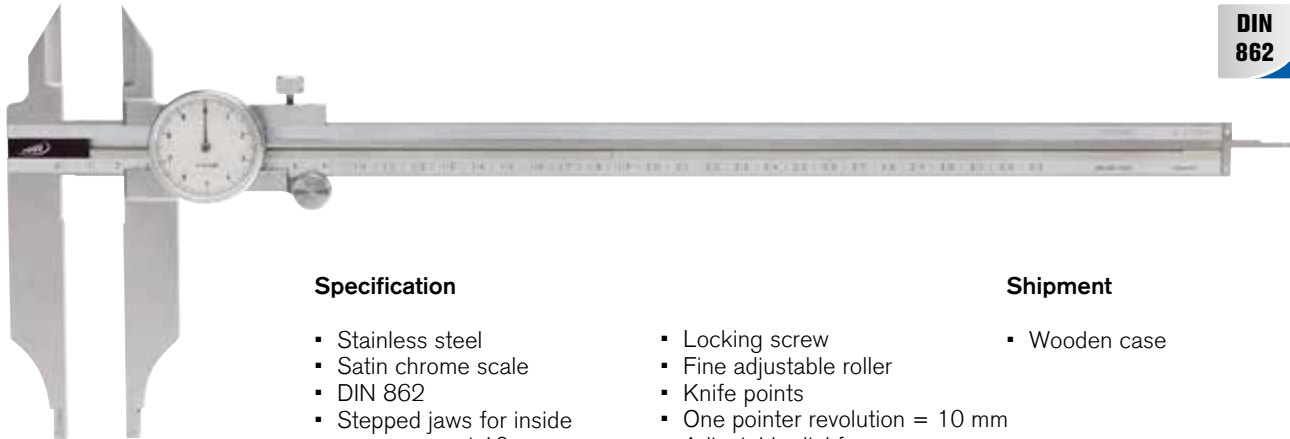

Specification

- Stainless steel
- Satin chrome scale
- DIN 862
- Stepped jaws for inside measurement 10 mm

Shipment

- Wooden case

		Measuring range		Jaw length		Reading	Depth gauge	Ref. No.	List price
		mm	inch	mm	inch	mm			Euro
		300	12	90	3.5	0.05	rectangular	0219 503	277.00

0238 Lightweight workshop calipers



0238 508

Specification

- To reduce weight, both, the slide and beam, are made of aluminium, with a hard anodized surface coating (1100 HV)
- Measuring faces are made of hardened stainless steel
- Factory standard
- Parallax-free reading
- Smoother, more even movement due to the double V-guide
- Locking screw
- Knife points
- Stepped jaws for inside measurement 20 mm

Shipment

- Wooden case for calipers up to 1000 mm, larger measuring ranges are packed into cardboard boxes


		Measuring range		Jaw length		Reading		Ref. No.	List price
		mm	inch	mm	inch	mm	mm		Euro
		300	12	90	3.5	0.02	0.02	0238 503	350.00
		500	20	150	6.0	0.02	0.02	0238 508	500.00
		800	31	150	6.0	0.02	0.02	0238 514	669.00
		1000	39	150	6.0	0.02	0.02	0238 518	783.00
	▪	1500	59	200	8.0	0.05	0.05	0238 524	2,031.00
	▪	2000	79	200	8.0	0.05	0.05	0238 526	2,365.00





HELIOS • PREISSER

0265 Caliper with cross points

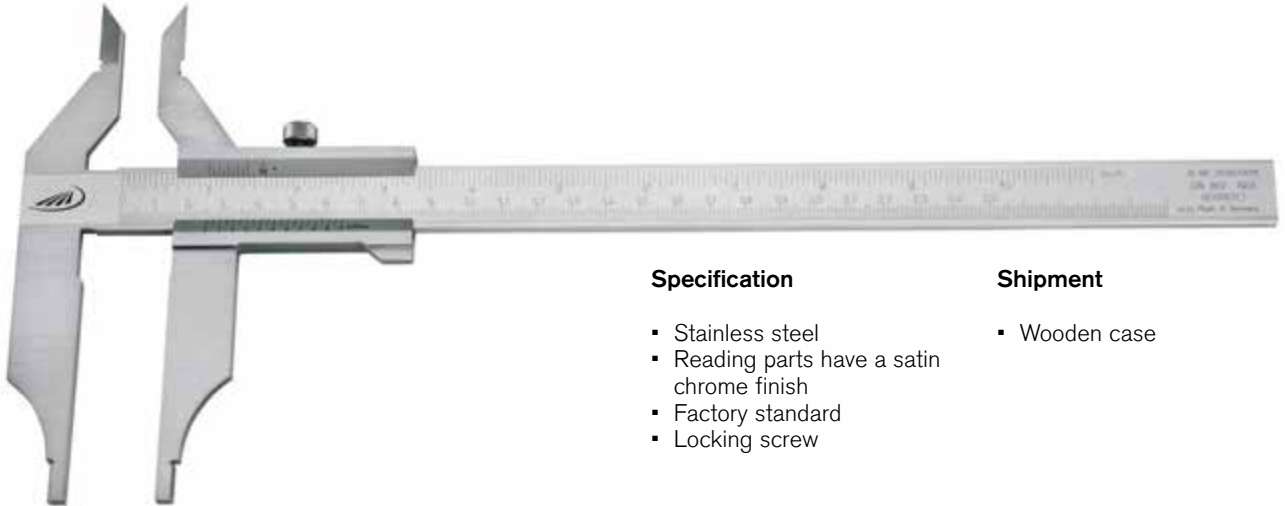

Specification


- Stainless steel
- Reading parts have a satin chrome finish
- Factory standard
- Locking screw

Shipment

- Wooden case

		Measuring range		Length of cross points		Jaw Length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch	mm	inch		
		250	10	55	2.17	80	3.15	0.02	0.001	0265 520 05	249.00

0266 Caliper with gripper points

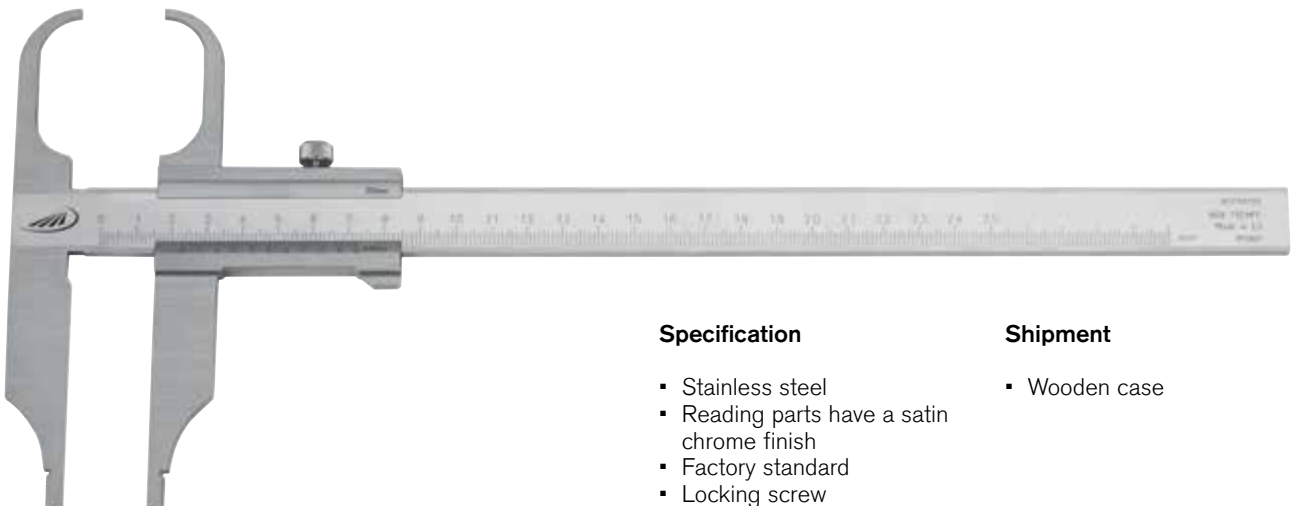

Specification

- Stainless steel
- Reading parts have a satin chrome finish
- Factory standard
- Locking screw

Shipment

- Wooden case

		Measuring range		Length of gripper points		Jaw Length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch	mm	inch		
		250	10	55	2.17	75	3	0.02	0.001	0266 520 05	334.00



1330 / 1331 DIGI-MET® Workshop caliper



Specification


- Stainless steel
- Inductive measuring system, resistant to damp and sweat
- DIN 862
- Knife points
- LCD display:
8.5 mm with measuring range 300 mm,
12.5 mm from measuring range 500 mm
- Locking screw

Electronic functions


- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output
RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case

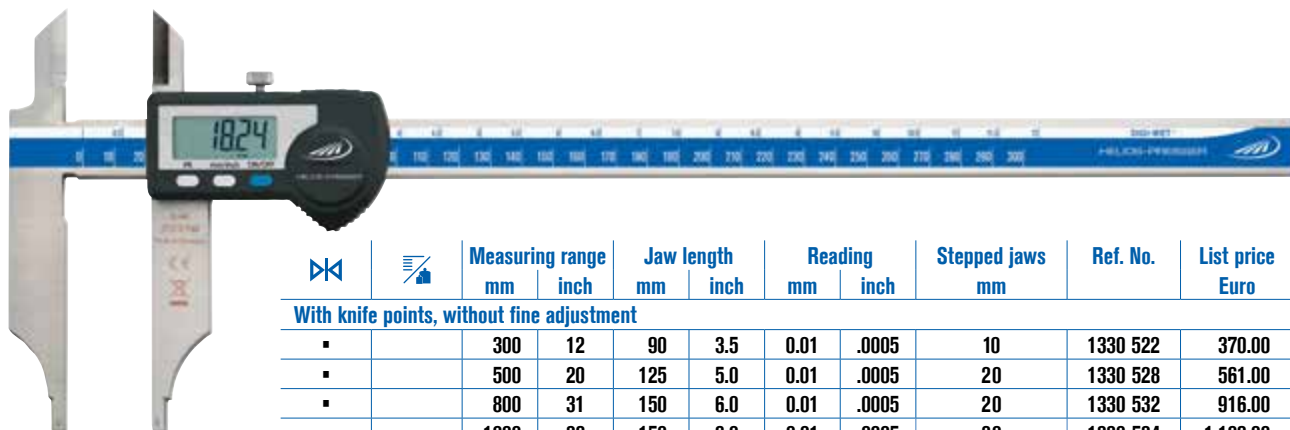		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price
		mm	inch	mm	inch	mm	inch	mm		Euro
With knife points, without fine adjustment										
▪		300	12	90	3.5	0.01	.0005	10	1330 522	370.00
▪		500	20	125	5.0	0.01	.0005	20	1330 528	561.00
▪		800	31	150	6.0	0.01	.0005	20	1330 532	916.00
▪		1000	39	150	6.0	0.01	.0005	20	1330 534	1,109.00

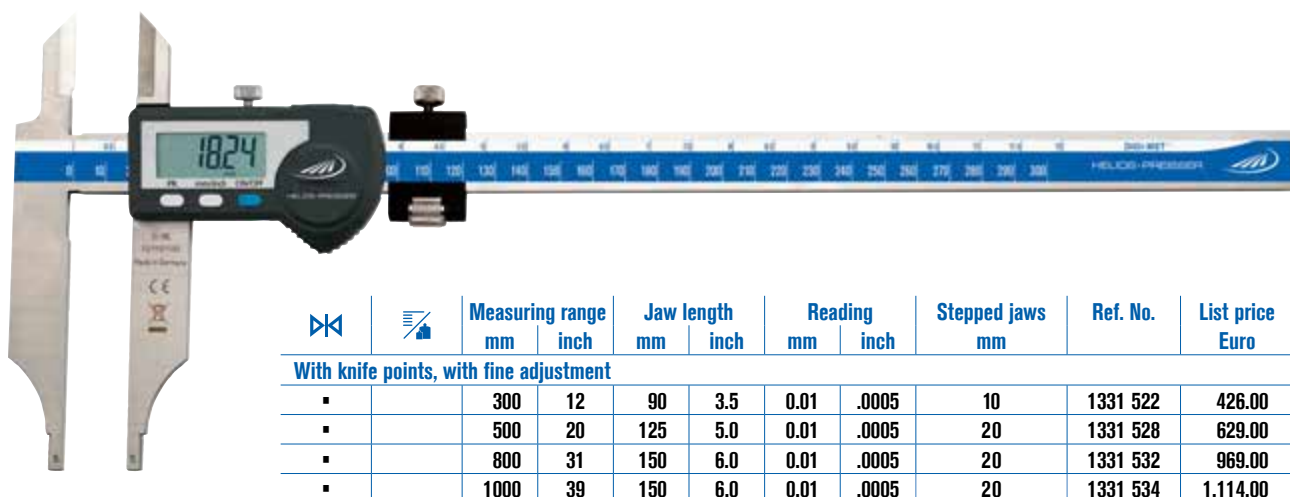

		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price
		mm	inch	mm	inch	mm	inch	mm		Euro
With knife points, with fine adjustment										
▪		300	12	90	3.5	0.01	.0005	10	1331 522	426.00
▪		500	20	125	5.0	0.01	.0005	20	1331 528	629.00
▪		800	31	150	6.0	0.01	.0005	20	1331 532	969.00
▪		1000	39	150	6.0	0.01	.0005	20	1331 534	1,114.00

Accessories

	Ref. No.	List price
		Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1334 / 1335 DIGI-MET® Workshop calipers



Specification

- Stainless steel
- Inductive measuring system, resistant to damp and sweat
- DIN 862
- LCD display: 8.5 mm with measuring range 300 mm, 12.5 mm from measuring range 500 mm
- Locking screw

Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)


Shipment

- Wooden case




DIN 862

1

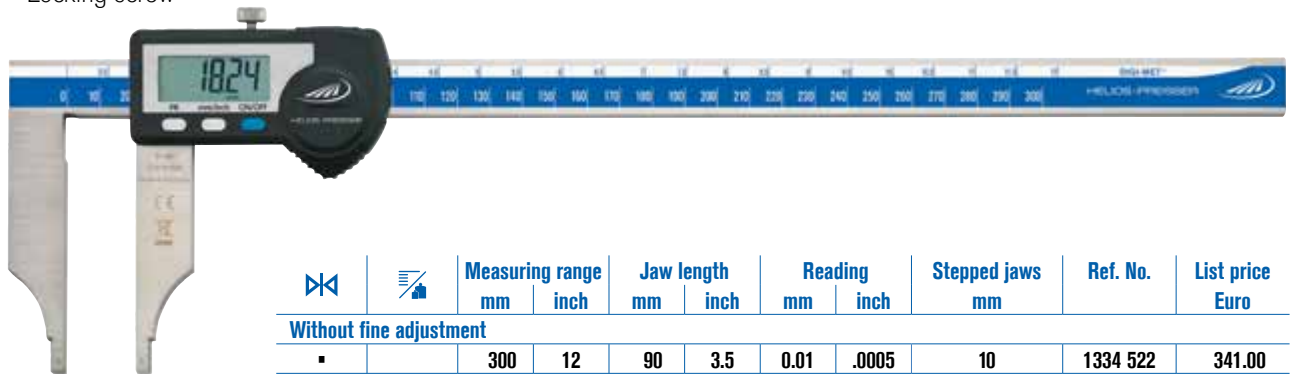

		Measuring range		Jaw length		Reading		Stepped jaws mm	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch			
Without fine adjustment										
▪		300	12	90	3.5	0.01	.0005	10	1334 522	341.00
▪		500	20	125	5.0	0.01	.0005	20	1334 528	478.00
▪		800	31	150	6.0	0.01	.0005	20	1334 532	836.00
▪		1000	39	150	6.0	0.01	.0005	20	1334 534	989.00

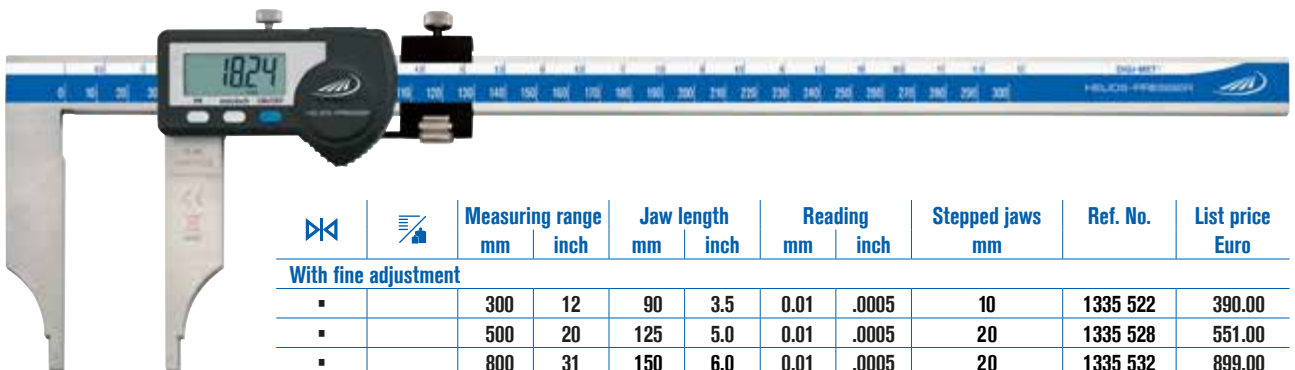

		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price
		mm	inch	mm	inch	mm	inch	mm		Euro
With fine adjustment										
▪		300	12	90	3.5	0.01	.0005	10	1335 522	390.00
▪		500	20	125	5.0	0.01	.0005	20	1335 528	551.00
▪		800	31	150	6.0	0.01	.0005	20	1335 532	899.00
▪		1000	39	150	6.0	0.01	.0005	20	1335 534	1.033.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1340 / 1341 DIGI-MET® Workshop calipers IP65



Specification


- Stainless steel
- Inductive measuring system, protection class IP65
- DIN 862
- Knife points
- LCD display:
8.5 mm with measuring range 300 mm,
12.5 mm from measuring range 500 mm
- Locking screw

Electronic functions


- ON/OFF switch
- QuickStart** Electronic
- QuickLock** Function
- Zero-setting at any position
- mm/inch-conversion
- Variable data output
RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case

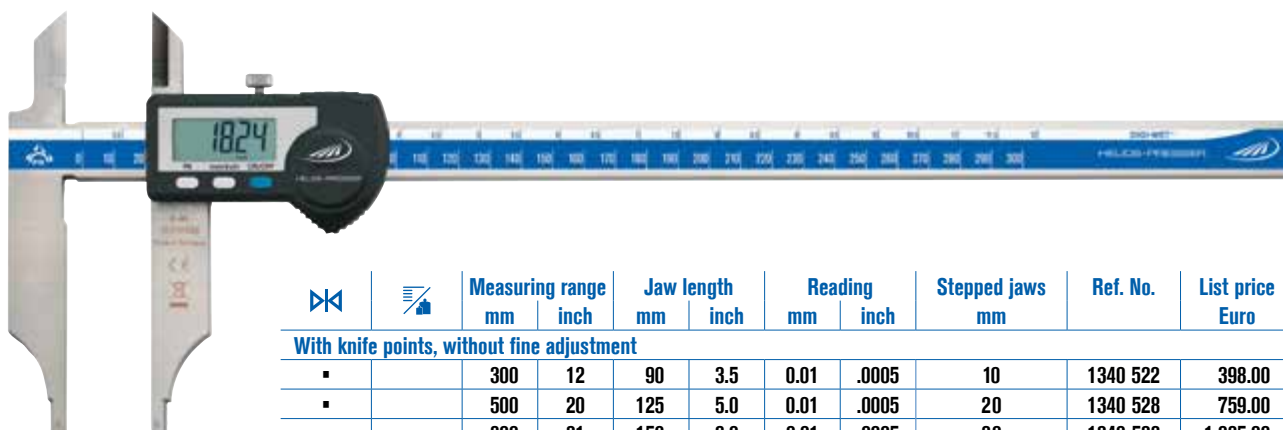

Marked	Marked	Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price
		mm	inch	mm	inch	mm	inch	mm		Euro
With knife points, without fine adjustment										
▪		300	12	90	3.5	0.01	.0005	10	1340 522	398.00
▪		500	20	125	5.0	0.01	.0005	20	1340 528	759.00
▪		800	31	150	6.0	0.01	.0005	20	1340 532	1,025.00
▪		1000	39	150	6.0	0.01	.0005	20	1340 534	1,261.00

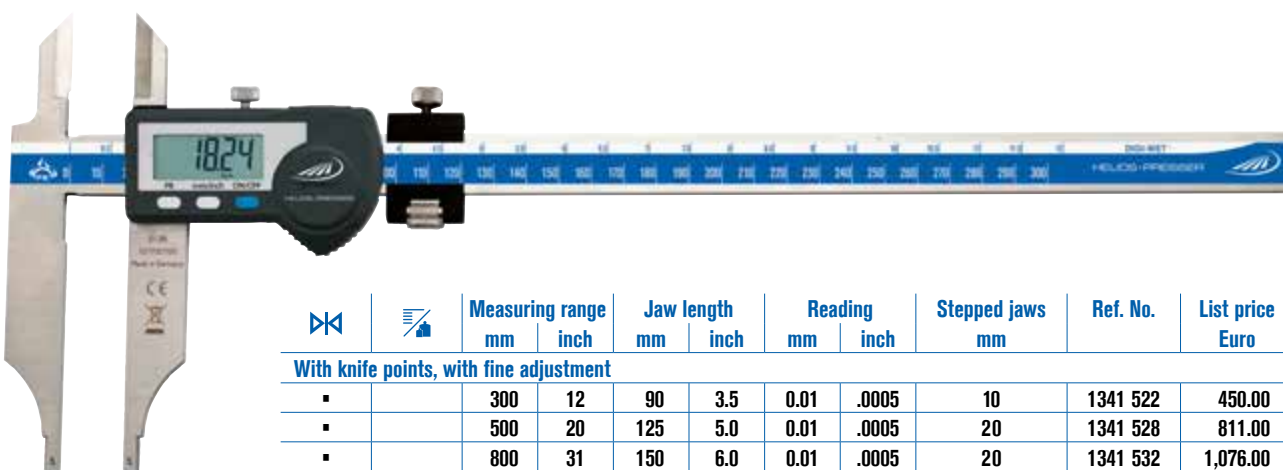

Marked	Marked	Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price
		mm	inch	mm	inch	mm	inch	mm		Euro
With knife points, with fine adjustment										
▪		300	12	90	3.5	0.01	.0005	10	1341 522	450.00
▪		500	20	125	5.0	0.01	.0005	20	1341 528	811.00
▪		800	31	150	6.0	0.01	.0005	20	1341 532	1,076.00
▪		1000	39	150	6.0	0.01	.0005	20	1341 534	1,312.00

Accessories

	Ref. No.	List price
		Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1342 / 1343 DIGI-MET® Workshop calipers IP65



Specification

- Stainless steel
- Inductive measuring system, protection class IP65
- DIN 862
- LCD display:
8.5 mm with measuring range 300 mm,
12.5 mm from measuring range 500 mm
- Locking screw

Electronic functions


- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero-setting at any position
- mm/inch-conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment


- Wooden case



1

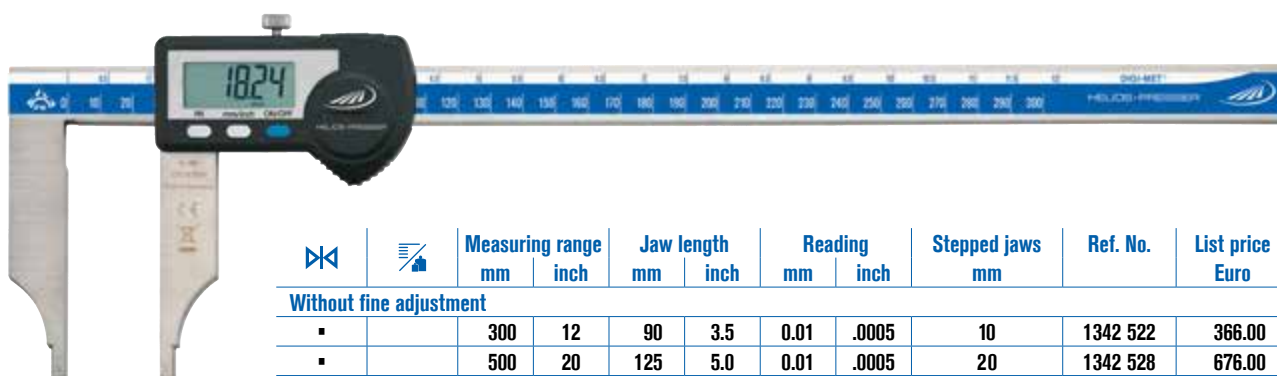

		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch	mm		
Without fine adjustment										
▪		300	12	90	3.5	0.01	.0005	10	1342 522	366.00
▪		500	20	125	5.0	0.01	.0005	20	1342 528	676.00
▪		800	31	150	6.0	0.01	.0005	20	1342 532	935.00
▪		1000	39	150	6.0	0.01	.0005	20	1342 534	1.163.00

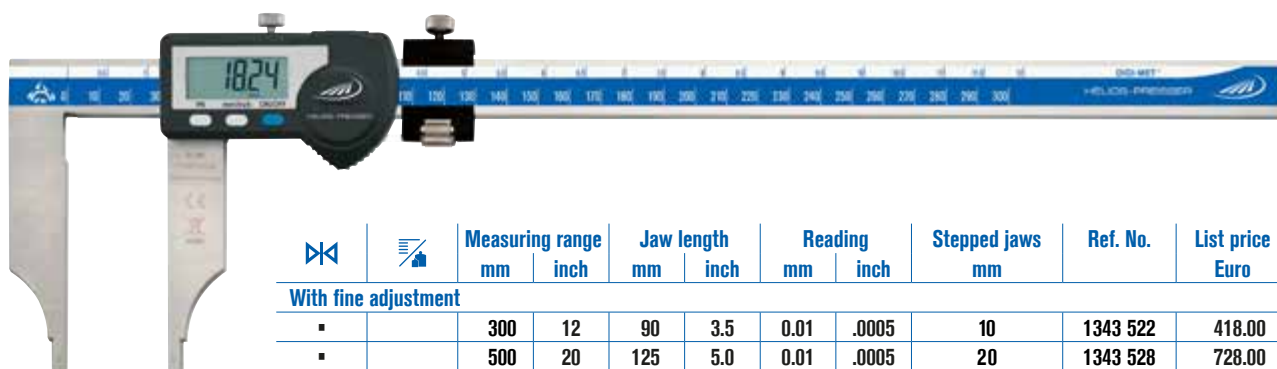

		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch	mm		
With fine adjustment										
▪		300	12	90	3.5	0.01	.0005	10	1343 522	418.00
▪		500	20	125	5.0	0.01	.0005	20	1343 528	728.00
▪		800	31	150	6.0	0.01	.0005	20	1343 532	987.00
▪		1000	39	150	6.0	0.01	.0005	20	1343 534	1.214.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



0222 / 0223 DIGI-MET® Workshop calipers long version



Specification


- Stainless steel
- LCD display 8.5 mm
- Locking screw
- Knife points
- Factory standard

Electronic functions


- ON/OFF switch
- Zero setting at any position
- mm/inch conversion
- Data output Opto RS 232
- Hold Function
- PRESET Function (setting a numerical value)

Shipment

- Wooden case

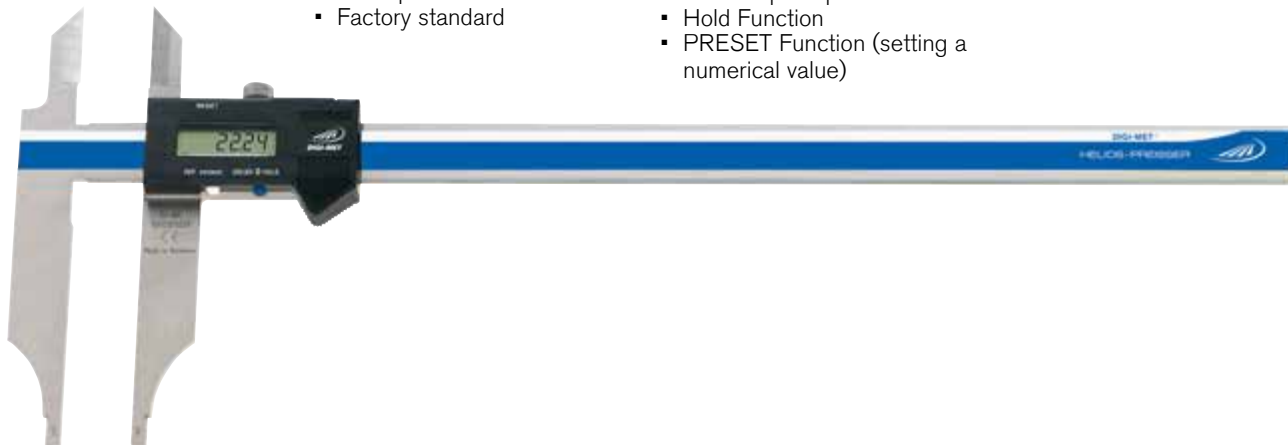

		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch	mm		
With knife points, without fine adjustment										
	▪	1500	59	200	8.0	0.01	.0005	30	0222 734	2,473.00
	▪	2000	79	200	8.0	0.01	.0005	30	0222 736	2,967.00

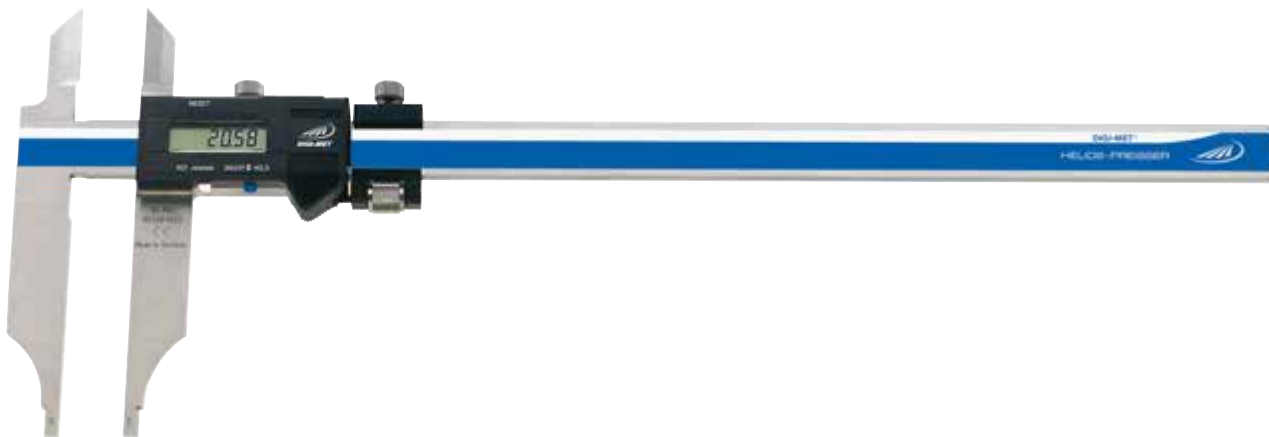

		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price
		mm	inch	mm	inch	mm	inch			
With knife points, with fine adjustment										
	▪	1500	59	200	8.0	0.01	.0005	30	0223 734	2,638.00
	▪	2000	79	200	8.0	0.01	.0005	30	0223 736	3,057.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for Opto to RS 232	0996 701	71.00
Cable for Opto to USB	0996 705	136.00
USB-keyboard interface cable Opto RS 232	0997 770	232.00



0224 / 0225 DIGI-MET® Workshop calipers long version



Specification

- Stainless steel
- LCD display 8.5 mm
- Locking screw
- Without knife points
- Factory standard

Electronic functions

- ON/OFF switch
- Zero setting at any position
- mm/inch conversion
- Data output Opto RS 232
- Hold Function
- PRESET Function (setting a numerical value)

Shipment

- Wooden case



1



		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price
		mm	inch	mm	inch	mm	inch	mm		Euro
Without fine adjustment										
	▪	1500	59	200	8.0	0.01	.0005	30	0224 734	2,236.00
	▪	2000	79	200	8.0	0.01	.0005	30	0224 736	2,710.00



		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price
		mm	inch	mm	inch	mm	inch	mm		Euro
With fine adjustment										
	▪	1500	59	200	8.0	0.01	.0005	30	0225 734	2,357.00
	▪	2000	79	200	8.0	0.01	.0005	30	0225 736	2,798.00

Accessories

	Ref. No.	List price
		Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for Opto to RS 232	0996 701	71.00
Cable for Opto to USB	0996 705	136.00
USB-keyboard interface cable Opto RS 232	0997 770	232.00



1351 DIGI-MET® Workshop calipers with cross points



Specification


- Stainless steel
- DIN 862
- LCD display:
8.5 mm with measuring range 300 mm
12.5 mm with measuring range 500 mm
- Locking screw
- Inside cross points
- Three way measurement

Electronic functions


- ON/OFF switch
- QuickStart** Electronic
- QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case

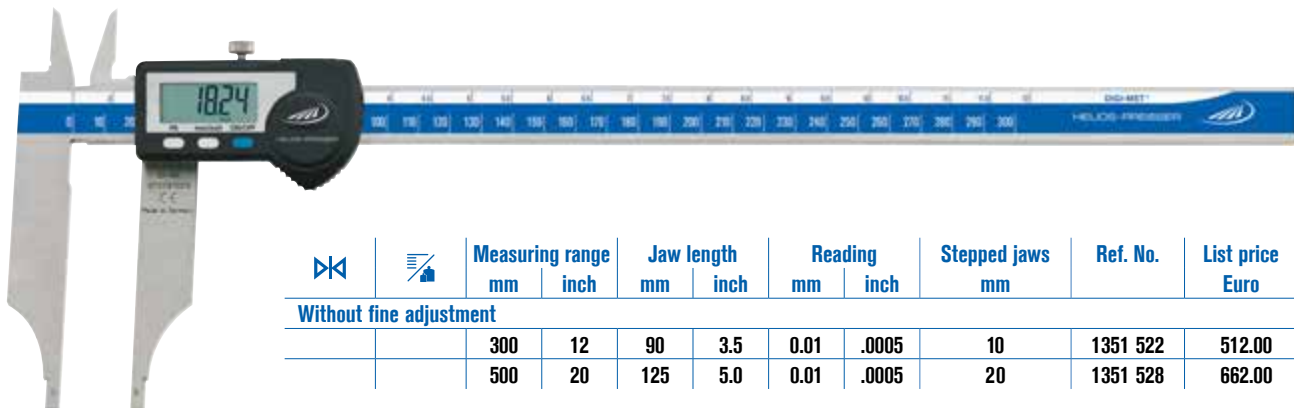

		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch	mm		
Without fine adjustment										
		300	12	90	3.5	0.01	.0005	10	1351 522	512.00
		500	20	125	5.0	0.01	.0005	20	1351 528	662.00

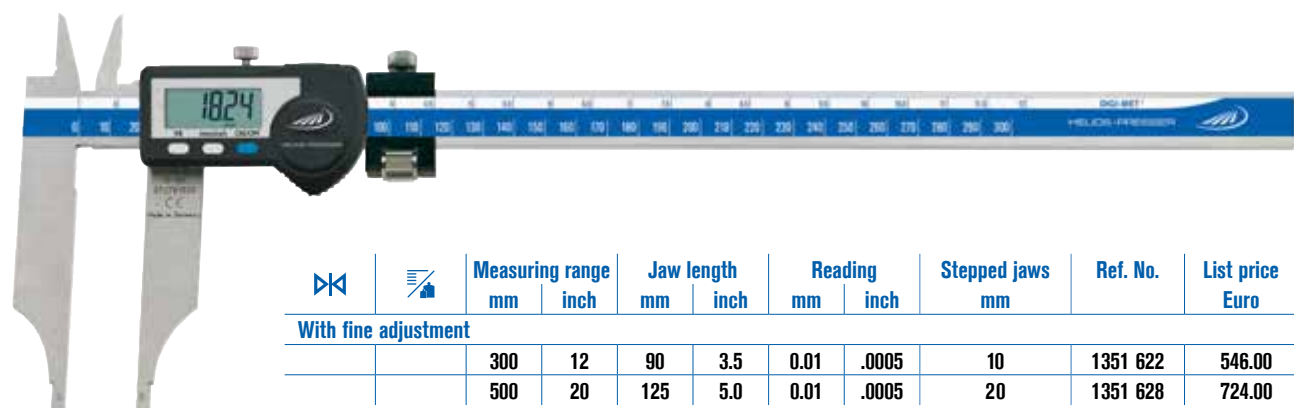

		Measuring range		Jaw length		Reading		Stepped jaws	Ref. No.	List price
		mm	inch	mm	inch	mm	inch	mm		
With fine adjustment										
		300	12	90	3.5	0.01	.0005	10	1351 622	546.00
		500	20	125	5.0	0.01	.0005	20	1351 628	724.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



HELIOS • PREISSER

1338 DIGI-MET® Workshop caliper PRISMA



Specification

- Double prisma guide with excellent sliding characteristics
- Stainless steel
- Accuracy in accordance to DIN 862
- LCD display 8.5 mm
- Locking screw
- Knife points
- Stepped jaws for inside measurement 10 mm

Electronic functions


- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS232 + Digimatic + USB
- **PRESET** Function (setting a numerical value)

Shipment

- Wooden case



1

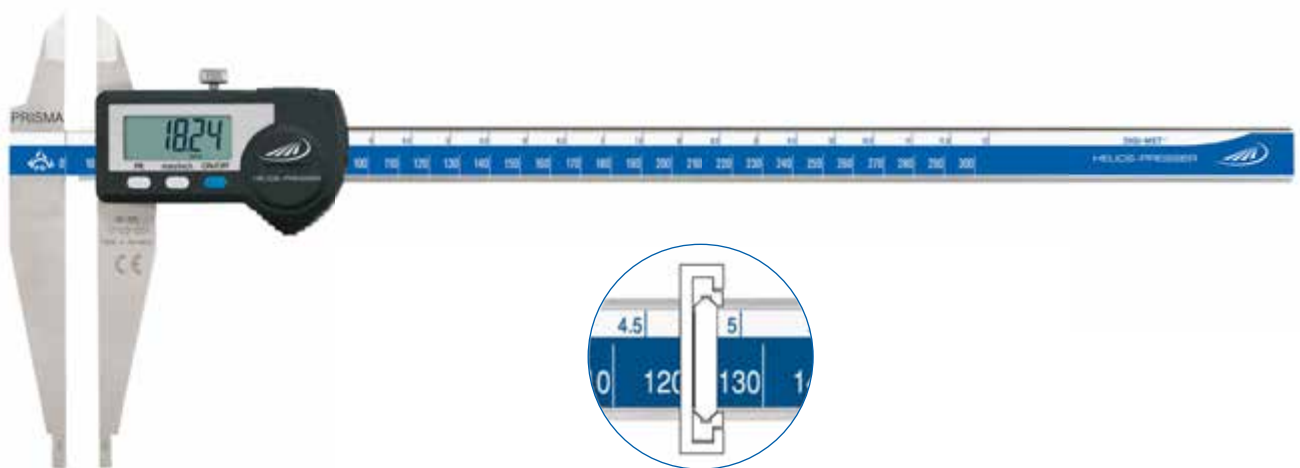


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
▪		300	12	90	3.5	0.01	.0005	1338 522	439.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



0228 DIGI-MET® Workshop calipers lightweight

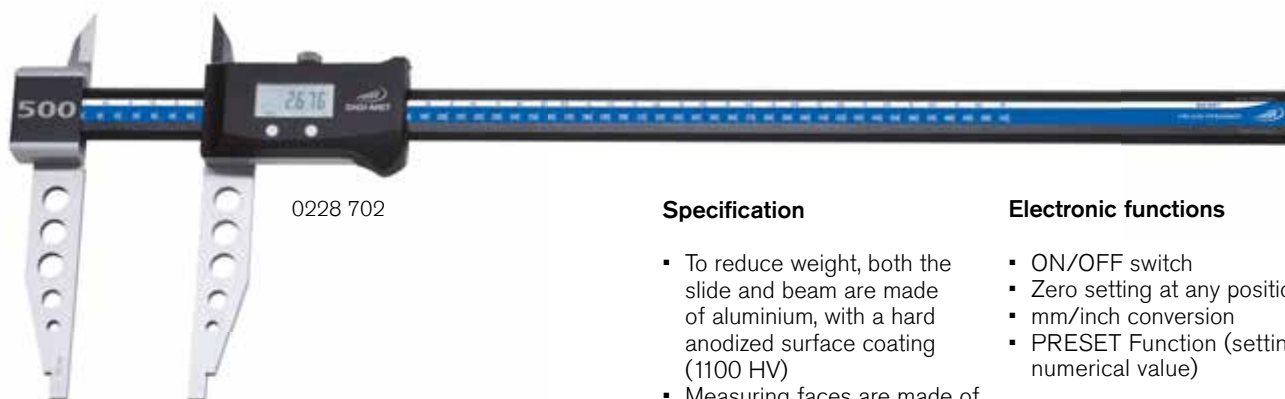

0228 702

Specification

- To reduce weight, both the slide and beam are made of aluminium, with a hard anodized surface coating (1100 HV)
- Measuring faces are made of hardened stainless steel
- Factory standard
- Smoother, more even movement due to the double V-guide
- LCD display
- Locking screw
- Knife points

Electronic functions


- ON/OFF switch
- Zero setting at any position
- mm/inch conversion
- PRESET Function (setting a numerical value)

Shipment

- Wooden case

		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		300	12	90	3.5	0.01	.0005	0228 701*	455.00
		500	20	150	6.0	0.01	.0005	0228 702	633.00
		800	31	150	6.0	0.01	.0005	0228 703	890.00
		1000	39	150	6.0	0.01	.0005	0228 704	1,050.00
	▪	1500	59	200	8.0	0.01	.0005	0228 724	2,650.00
	▪	2000	79	200	8.0	0.01	.0005	0228 726	3,150.00

* With data output Opto RS232

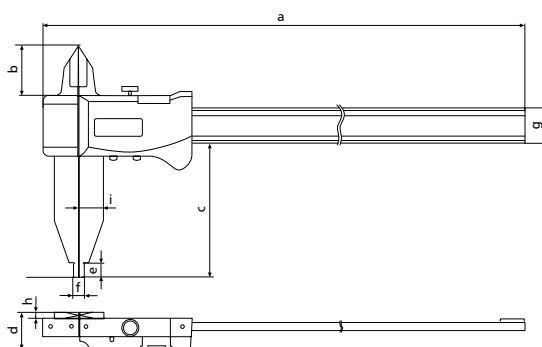


Dimensions	a	b	c	d	e	f	g	h	i
300	450	33	90	24.5	10	10	25.0	4.5	17.0
500	726	42	150	33.5	15	20	31.9	6.0	29.0
800	1026	42	150	33.5	15	20	31.9	6.0	29.0
1000	1226	42	150	33.5	15	20	31.9	6.0	29.0
1500	1526	42	200	33.5	15	20	31.9	6.0	29.0
2000	2026	42	200	33.5	15	20	31.9	6.0	29.0

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60



1351 DIGI-MET® Caliper with cross points

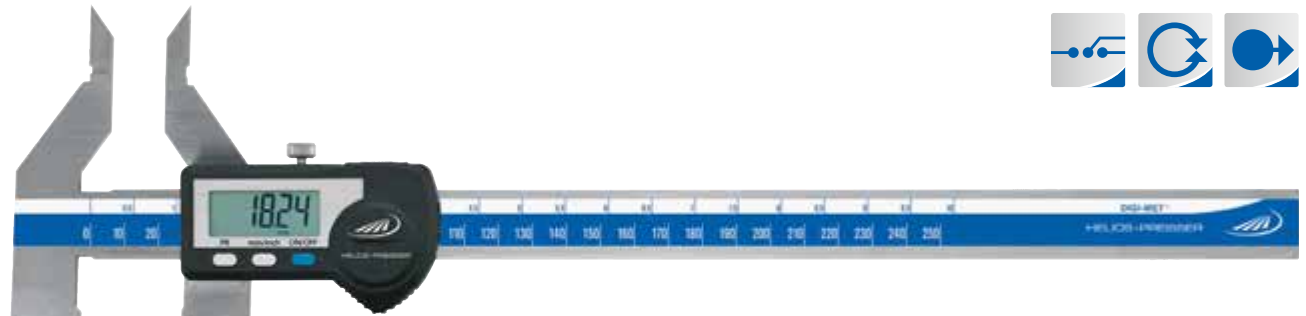

Specification

- Stainless steel
- LCD display 8.5 mm
- Factory standard
- Locking screw
- Inside cross points

Electronic functions


- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero-setting at any position
- mm/inch-conversion
- Variable data output
RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case

		Measuring range		Length of cross points		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch	mm	inch		
		250	10	55	2.17	80	3.15	0.01	0.005	1351 920	461.00

1354 DIGI-MET® Caliper with gripper points

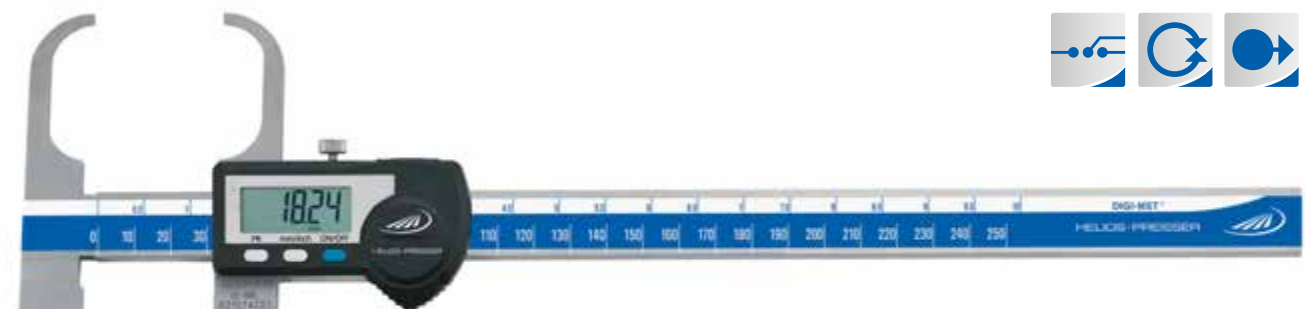

Specification

- Stainless steel
- LCD display 8.5 mm
- Factory standard
- Locking screw
- Gripper points

Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output
RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)


Shipment

- Wooden case

		Measuring range		Length of gripper points		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch	mm	inch		
		250	10	55	2.17	75	3.00	0.01	0.005	1354 520	545.00




1348 DIGI-MET® Universal calipers

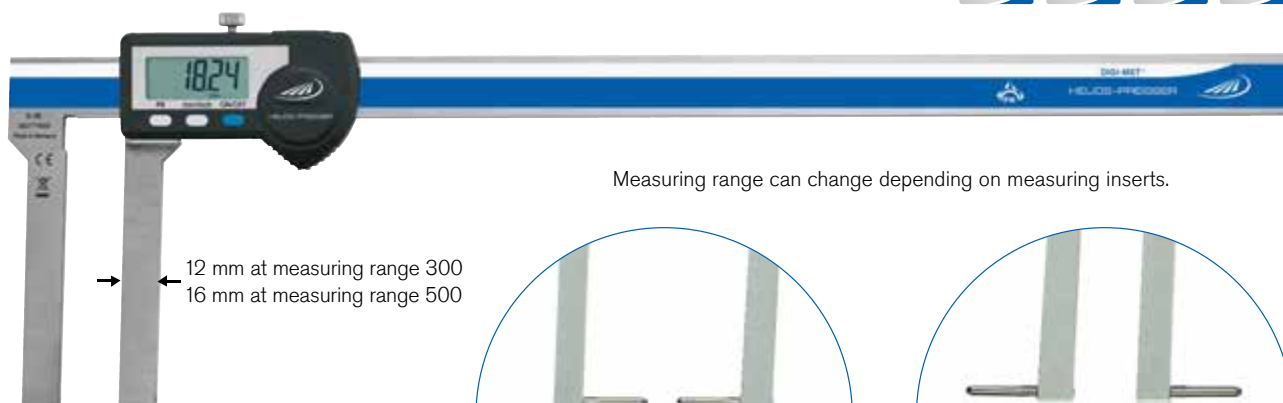


Measuring range can change depending on measuring inserts.

→ 12 mm at measuring range 300
← 16 mm at measuring range 500

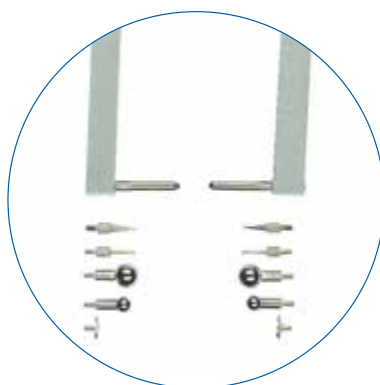

▪ for external measurements

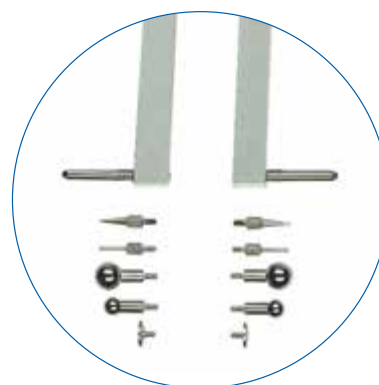

▪ for internal measurements

Specification

- Stainless steel
- Factory standard
- LCD display 8.5 or 12.5 mm
- Locking screw
- For internal and external measurements
- Individually adaptable on

problematic measuring tasks through measuring inserts with thread M 2.5 (optional see pages 132 - 134)

Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment

- Wooden case
- **Without measuring inserts (correct measuring inserts with thread M 2.5 see pages 132 - 134)**

		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		300	12	90	3.5	0.01	.0005	1348 722	561.00
		500	20	100	4.0	0.01	.0005	1348 728	719.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00




HELIOS • PREISSER


1326 Universal pocket caliper "Pocket Talent"



1



0710177




0710161

See No. 1326 932 on page 29



0250 Contraction vernier calipers

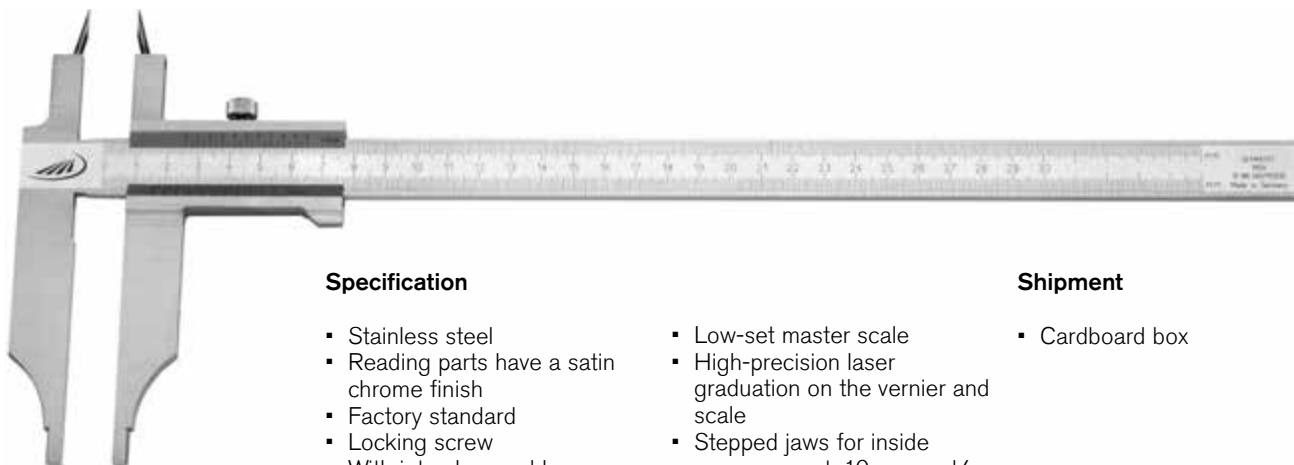

Specification

- Stainless steel
- Reading parts have a satin chrome finish
- Factory standard
- Locking screw
- With interchangeable hardened scribing jaws
- Low-set master scale
- High-precision laser graduation on the vernier and scale
- Stepped jaws for inside measurement: 10 mm and/or 20 mm*

Shipment

- Cardboard box

		Measuring range mm	Jaw length mm	Reading		Ref. No.	List price Euro
				mm	mm		
Direct reading for internal and external measurement							
		300	90	0.05	0.05	0250 501	236.00
		500	150	0.05	0.05	0250 502*	642.00
		600	150	0.05	0.05	0250 503*	761.00
		800	150	0.05	0.05	0250 504*	961.00
		1000	150	0.05	0.05	0250 505*	1,167.00
Contraction scale divisions 1.0% ▪ 1.5% ▪ 2.0% ▪ 1/1 mm							
		300	90	0.1		0250 511	254.00
		500	150	0.1		0250 512*	674.00
		600	150	0.1		0250 513*	801.00
		800	150	0.1		0250 514*	1,030.00
		1000	150	0.1		0250 515*	1,251.00
Contraction scale divisions 0.5% ▪ 0.8% ▪ 1.0% ▪ 1/1 mm							
		300	90	0.1		0250 521	254.00
		500	150	0.1		0250 522*	674.00
		600	150	0.1		0250 523*	801.00
		800	150	0.1		0250 524*	1,030.00
		1000	150	0.1		0250 525*	1,251.00
Contraction scale divisions 1.0% ▪ 1.25% ▪ 1.5% ▪ 1/1 m							
		300	90	0.1		0250 531	254.00
		500	150	0.1		0250 532*	674.00
		600	150	0.1		0250 533*	801.00
		800	150	0.1		0250 534*	1,030.00
		1000	150	0.1		0250 535*	1,251.00
Contraction scale divisions 1.75% ▪ 2.0% ▪ 2.5% ▪ 1/1 mm							
		300	90	0.1		0250 541	254.00
		500	150	0.1		0250 542*	674.00
		600	150	0.1		0250 543*	801.00
		800	150	0.1		0250 544*	1,030.00
		1000	150	0.1		0250 545*	1,251.00





0250 Contraction vernier calipers



		Measuring range mm	Jaw length mm	Reading mm		Ref. No.	List price Euro
Contraction scale divisions 1.0% ▀ 1.25% ▀ 2.0% ▀ 1/1 mm							
		300	90	0.1		0250 551	254.00
		500	150	0.1		0250 552*	674.00
		600	150	0.1		0250 553*	801.00
		800	150	0.1		0250 554*	1,030.00
		1000	150	0.1		0250 555*	1,251.00
Contraction scale divisions 0.3% ▀ 0.4% ▀ 0.6% ▀ 1/1 mm							
		300	90	0.1		0250 561	254.00
		500	150	0.1		0250 562*	674.00
		600	150	0.1		0250 563*	801.00
		800	150	0.1		0250 564*	1,030.00
		1000	150	0.1		0250 565*	1,251.00
Contraction scale divisions 1.0% ▀ 1.25% ▀ 1.5% ▀ 2.0%							
		300	90	0.1		0250 571	267.00
		500	150	0.1		0250 572*	743.00
		600	150	0.1		0250 573*	884.00
		800	150	0.1		0250 574*	1,112.00
		1000	150	0.1		0250 575*	1,350.00

Interchangeable points (pair) for contraction vernier calipers




Specification

- dia. 3.0 mm and/or
dia. 4.0 mm*

		For measuring range	Material	Ref. No.	List price Euro
		300 mm	Steel, hardened	0250 101	5.50
		500 + 600 mm	Steel, hardened	0250 102	11.00
		800 + 1000 mm	Steel, hardened	0250 103*	15.00
		300 mm	Carbide	0250 201	55.00
		500 + 600 mm	Carbide	0250 202	79.00



0262 Caliper for external locking grooves

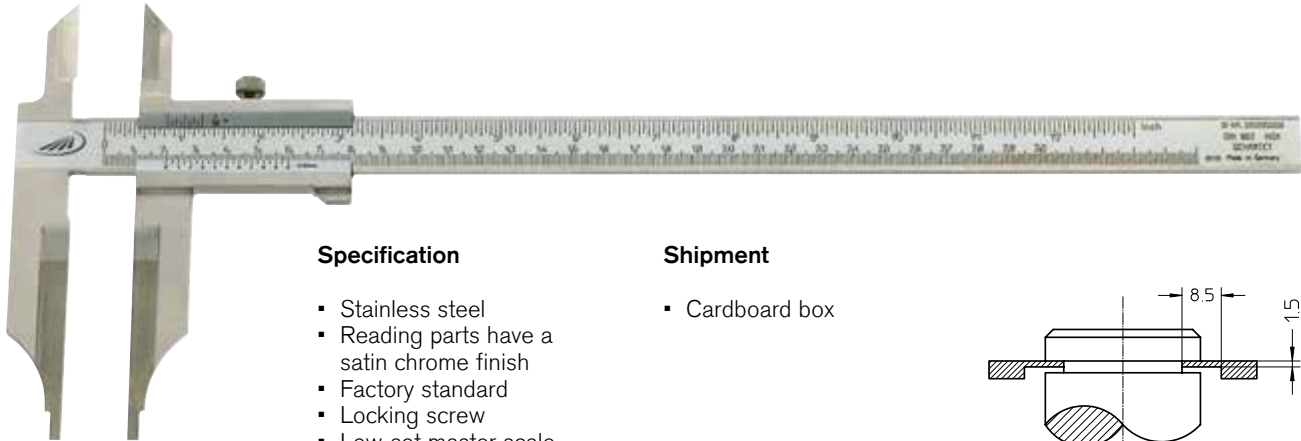


Specification

- Stainless steel
- Reading parts have a satin chrome finish
- Factory standard
- Locking screw
- Low-set master scale
- High-precision laser graduation on the vernier and scale


Shipment

- Cardboard box



		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		300	12	90	3.5	0.05	1/128	0262 503	250.00

1353 DIGI-MET® Caliper for external locking grooves

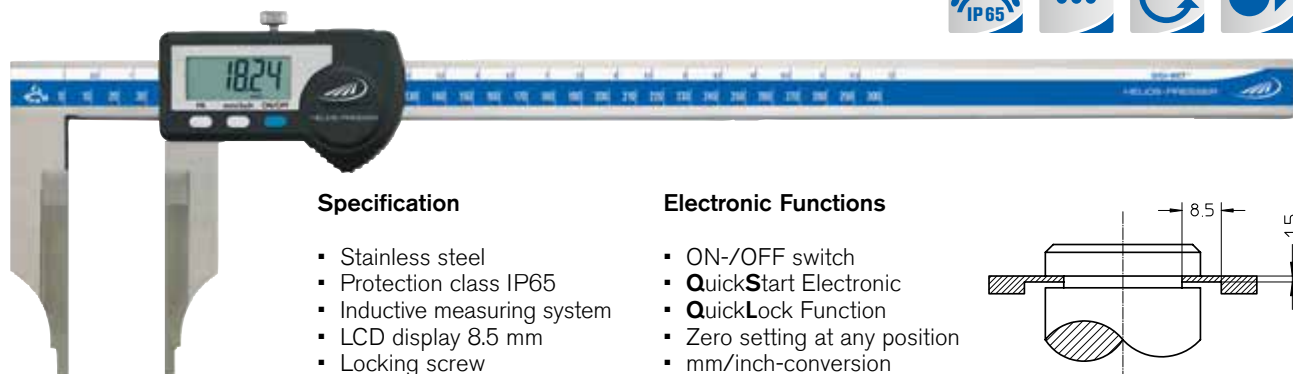


Specification

- Stainless steel
- Protection class IP65
- Inductive measuring system
- LCD display 8.5 mm
- Locking screw
- Factory Standard

Electronic Functions

- ON-/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch-conversion
- Variable data output
RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)



Shipment

- Wooden case


		Measuring range		Jaw length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		300	12	90	3.5	0.01	.0005	1353 522	453.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



0252 Brake drum vernier calipers

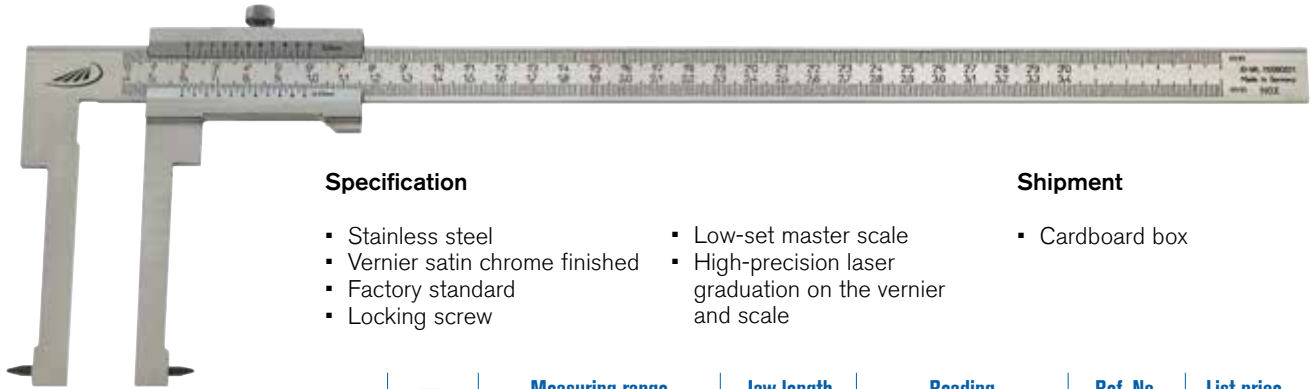

Specification

- Stainless steel
- Vernier satin chrome finished
- Factory standard
- Locking screw
- Low-set master scale
- High-precision laser graduation on the vernier and scale

Shipment


- Cardboard box

		Measuring range		Jaw length	Reading		Ref. No.	List price
		Internal mm	External mm	mm	mm	mm		Euro
		40 - 300	0 - 300	90	0.05	0.05	0252 201	132.00
		50 - 500	0 - 500	150	0.05	0.05	0252 202	254.00
		50 - 600	0 - 600	200	0.05	0.05	0252 203	278.00

Replacement points (pair) for brake drum vernier caliper

		For measuring range	Ref. No.	List price
				Euro
		300 mm	0252 291	4.00
		500 + 600 mm	0252 293	5.00

0253 Brake disc inspection gauges

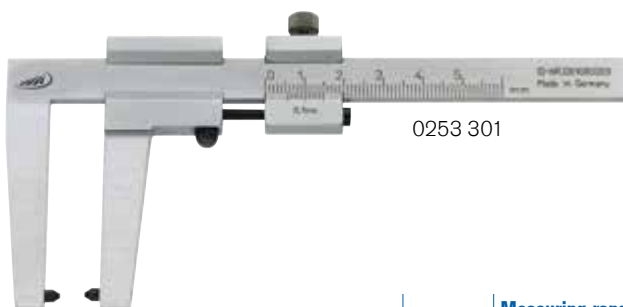

0253 301

Specification

- Special steel
- Reading parts have a satin chrome finish
- Factory standard
- Locking screw
- With trailing vernier
- High-precision laser graduation on the vernier and scale

Shipment

- Cardboard box

		Measuring range	Jaw length	Reading	Ref. No.	List price
		mm	mm	mm		Euro
For motorcycles						
		0 - 50	30	0.1	0253 300	78.00
For cars						
		0 - 50	50	0.1	0253 301	78.00
For buses						
		0 - 80	50	0.1	0253 302	99.00

Replacement points (pair) for brake disc inspection gauge

		Ref. No.	List price
			Euro
		0253 391	3.60



0258 Calipers for internal grooves




Specification


- Stainless steel
- Reading parts have a satin chrome finish
- Factory standard
- Locking screw
- Low-set master scale
- High-precision laser graduation on the vernier and scale

Shipment

- Cardboard box

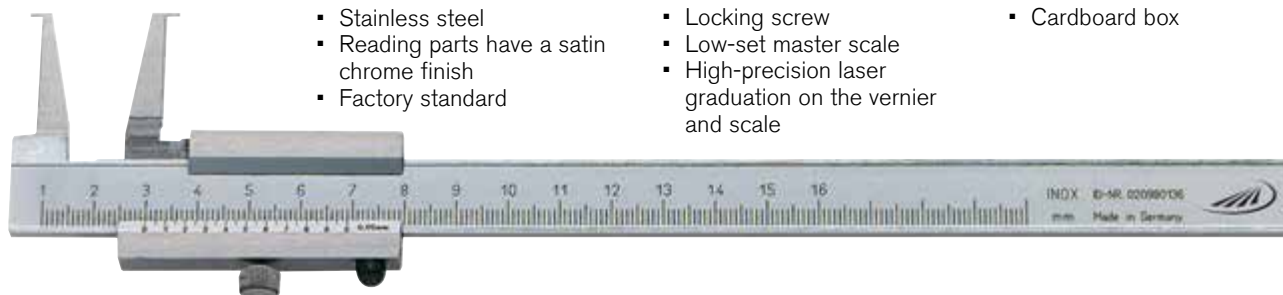

		Measuring range mm	Jaw length mm	Reading mm	Ref. No.	List price Euro
		10 - 160	25	0.05	0258 501	133.00
		20 - 160	40	0.05	0258 502	177.00
		26 - 200	60	0.05	0258 503	272.00
		30 - 250	80	0.05	0258 504	308.00
		35 - 300	100	0.05	0258 505	344.00

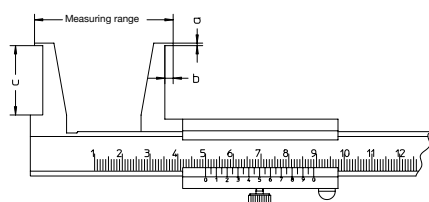

Dimensions for the digital version are identical

Measuring range mm	Jaw dimensions mm	
	a	b
10 - 160	0.9	3.0
20 - 160	2.0	5.0
26 - 200	3.0	7.0
30 - 250	4.0	8.5
35 - 300	5.0	10.0

1352 DIGI-MET® Calipers for internal grooves



Specification


- Stainless steel
- LCD display 7.5 mm
- Factory standard
- Locking screw

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output
RS 232 + Digimatic + USB
- PRESET Function
(setting a numerical value)

Shipment

- Wooden case

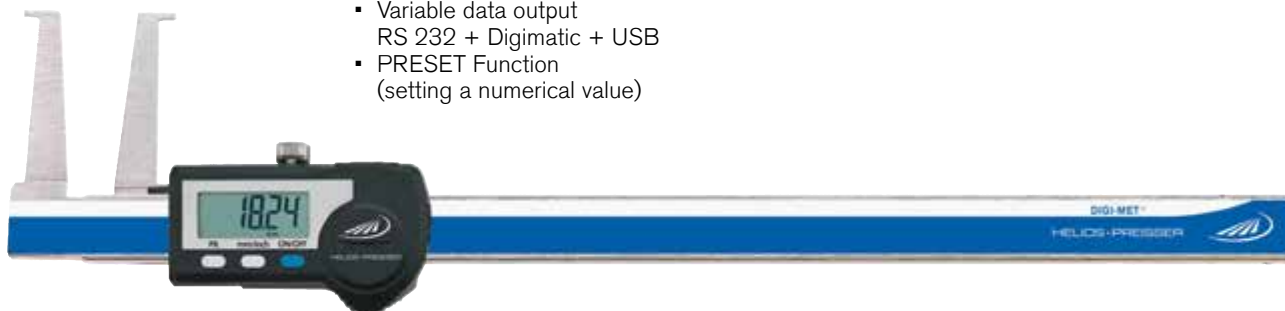

		Measuring range mm	Jaw length		Reading		Ref. No.	List price Euro
			mm	inch	mm	inch		
		10 - 160	25	1.0	0.01	.0005	1352 516	358.00
		20 - 160	40	1.5	0.01	.0005	1352 517	403.00
		26 - 200	60	2.3	0.01	.0005	1352 518	739.00
		30 - 250	80	3.1	0.01	.0005	1352 520	832.00
		35 - 300	100	3.9	0.01	.0005	1352 522	867.00



HELIOS • PREISSER

0260 Calipers for 3/5 point measurement




Specification

- Stainless steel
- Reading parts have a satin chrome finish
- Factory standard
- Locking screw

Shipment

- Cardboard box

1

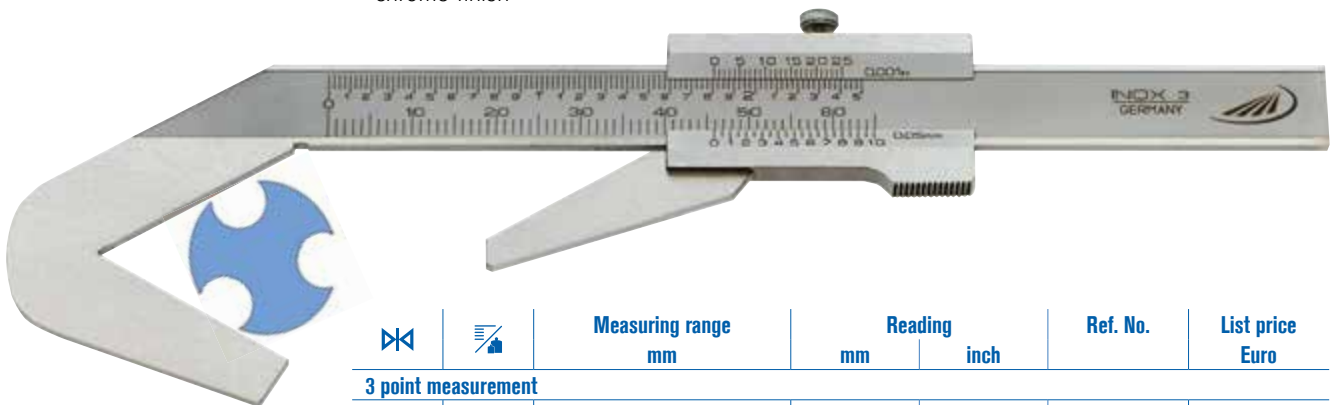

		Measuring range mm	Reading mm	inch	Ref. No.	List price Euro
3 point measurement		4 - 40	0.05	0.001	0260 501	68.00
5 point measurement		2 - 40	0.05	0.001	0260 502	68.00

0268 Milling tool caliper



Specification

- Stainless steel
- Vernier satin chrome finished
- Factory standard


Application

- Setting of milling cutters, can be used as height gauge

Shipment

- Cardboard box

		Measuring range mm	Jaw length mm	Stop length mm	Reading	Ref. No.	List price Euro
		200	80	100	0.05	0268 518	150.00
		300	80	100	0.05	0268 522	180.00

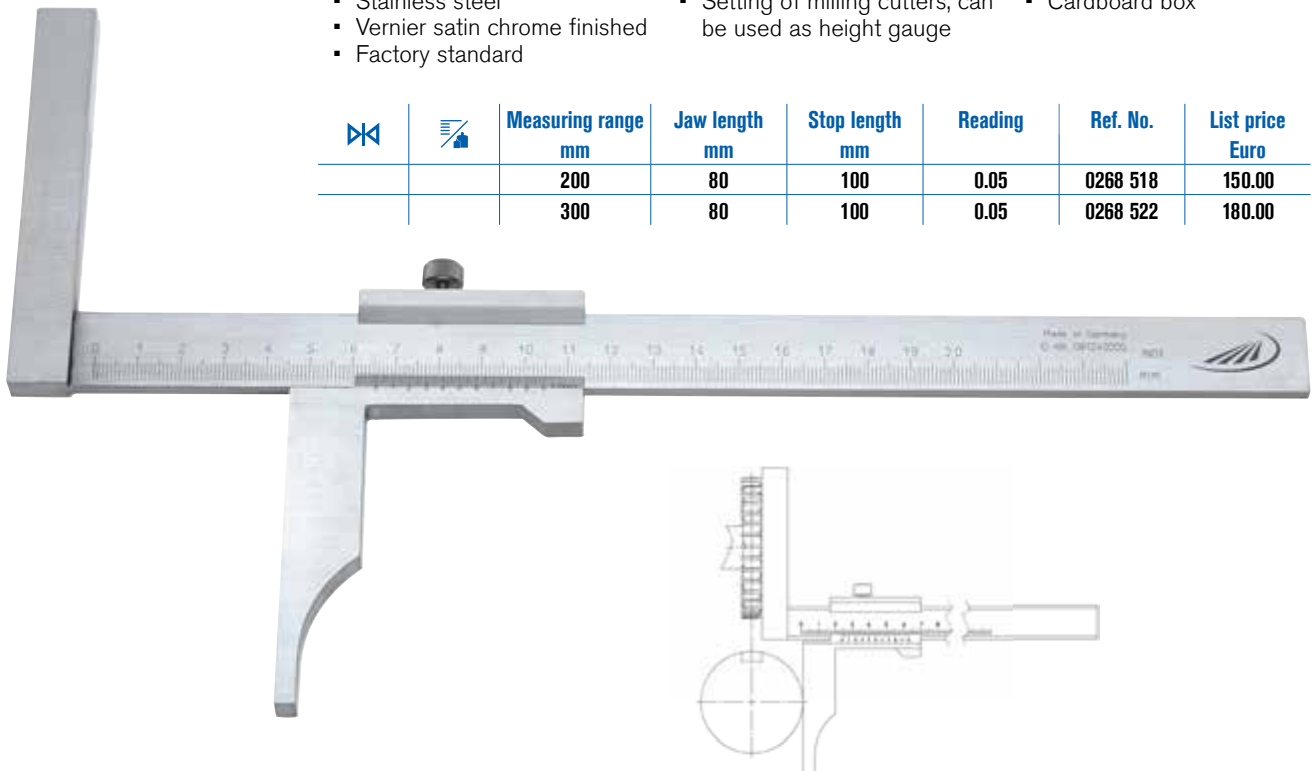



0597 Chamfer gauge



Specification

- Factory standard
- For simultaneously testing of the chamfer angle and the dimensional accuracy
- Stainless steel
- Reading 0.1 mm
- Reading parts are satin chrome finished

- Dimensions: 48x30x8.5 mm

Shipment

- Wooden case
- 3 interchangeable blades: 30°, 45°, 60°

		Measuring range mm	Reading mm	Ref. No.	List price Euro
		10	0.1	0597 301	162.00

0597 Radius gauge



Specification

- To determine radii size workpieces
- Stainless steel
- Reading parts are satin chrome finished

Shipment


- Wooden case

		Measuring range mm	Reading mm	Ref. No.	List price Euro
		10	0.1	0597 305	162.00



HELIOS • PREISSER

0268 Gear tooth calipers

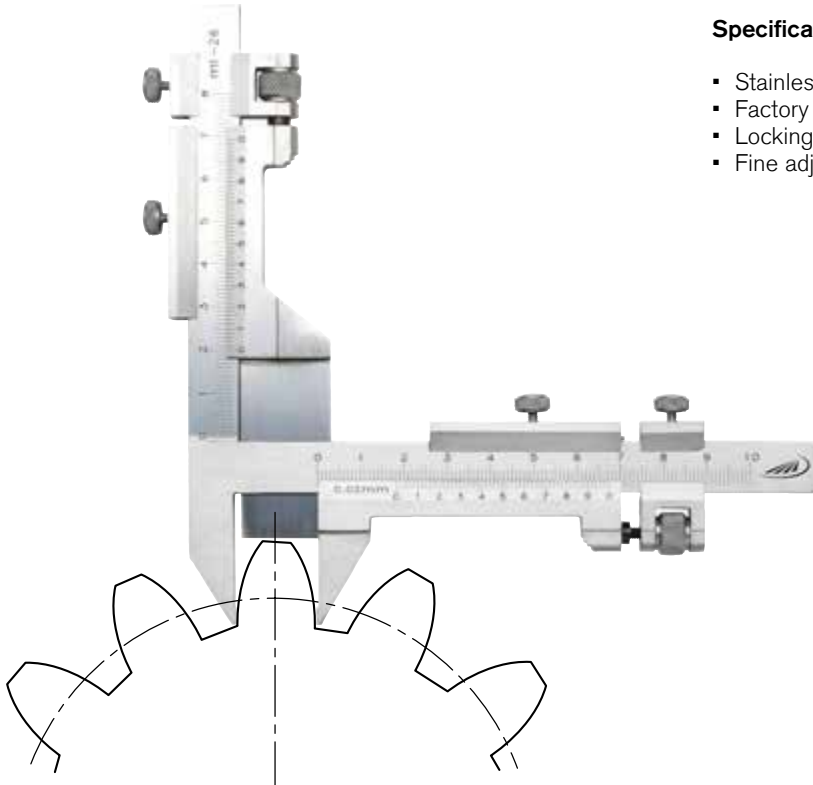

Specification

- Stainless steel
- Factory standard
- Locking screw
- Fine adjustment

Shipment

- Wooden case

1

		Module mm	Reading mm	Ref. No.	List price Euro
Hardened jaw tips					
		1 - 26	0.02	0268 201	285.00
Carbide tipped jaw tips					
		1 - 26	0.02	0268 211	347.00



0280 / 0281 Vernier depth gauges




Specification

- Stainless steel
- Reading parts have a satin chrome finish
- DIN 862
- Low-set master scale
- Locking screw
- Measuring rod with interchangeable pin
- High-precision laser graduation on the vernier and scale

Shipment


- Cardboard box

**DIN
862**

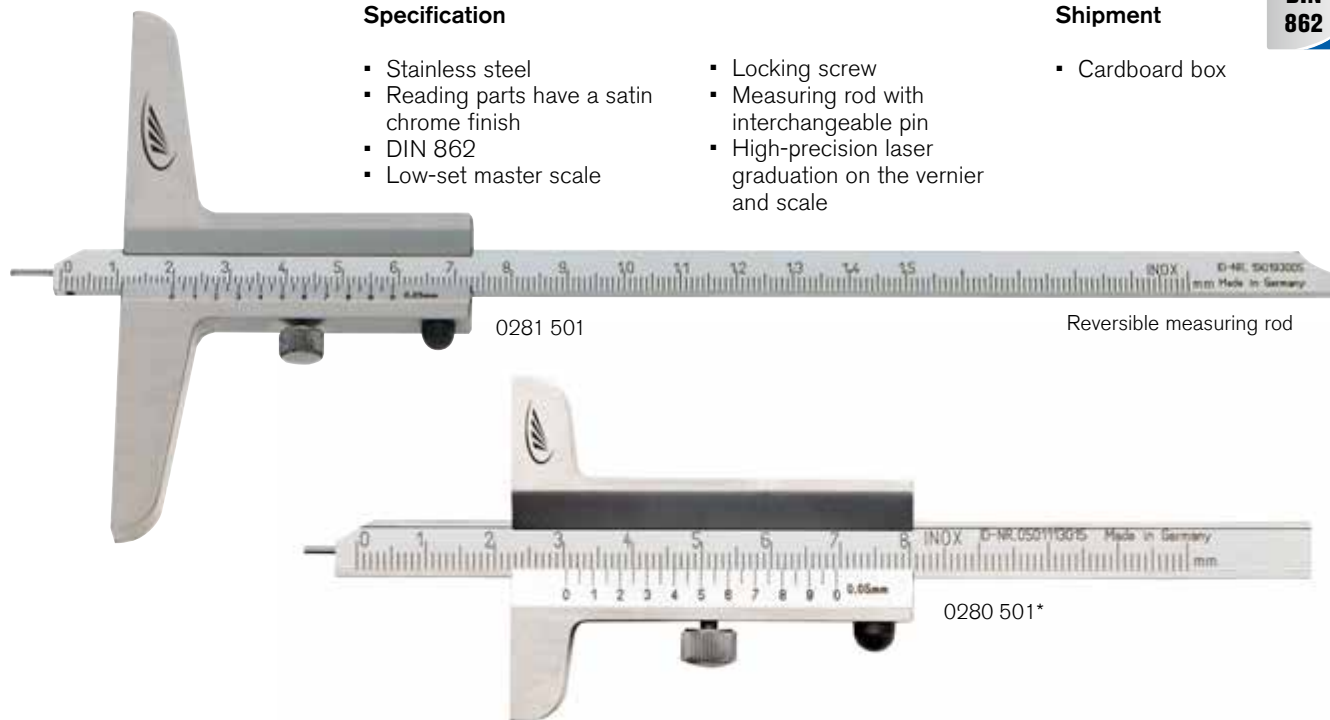

		Measuring range		Base length		Reading mm	Ref. No.	List price Euro
		mm	inch	mm	inch			
Vernier satin chrome finished, measuring rod with interchangeable pin								
▪		80		50	2	0.05	0280 501*	49.00
Vernier satin chrome finished, reversible measuring rod with interchangeable pin								
▪		150	6	100	4	0.05	0281 201	75.00
▪		200	8	100	4	0.05	0281 202	78.00
▪		250	10	130	5	0.05	0281 204	87.00
▪		300	12	150	6	0.05	0281 205	98.00
Vernier + scale satin chrome finished, reversible measuring rod with interchangeable pin								
▪		150	6	100	4	0.05	0281 501	82.00
▪		200	8	100	4	0.05	0281 502	85.00
▪		250	10	130	5	0.05	0281 504	97.00
▪		300	12	150	6	0.05	0281 505	106.00

* Factory standard

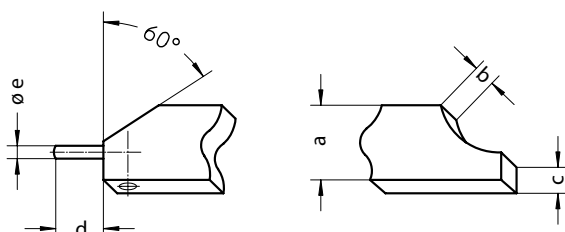

Meas. range mm	a	b	c	d	e
80	8	3	-	6	1
150 - 200	8	3	3.5	8	1.5
250 - 300	12	4	4	8	2



HELIOS • PREISSER

0282 Vernier depth gauges



Specification

- DIN 862
- Locking screw
- Straight measuring rod
- Low-set master scale
- High-precision laser graduation on the vernier and scale

Shipment


- Cardboard box for calipers up to 1000 mm, larger measuring ranges are individually packed

**DIN
862**

1



		Measuring range		Base length		Reading mm	Ref. No.	List price Euro
		mm	inch	mm	inch			
Stainless steel, vernier satin chrome finished								
▪		150	6	100	4	0.05	0282 201	66.00
▪		200	8	100	4	0.05	0282 202	68.00
▪		300	12	100	4	0.05	0282 203	79.00
▪		250	10	130	5	0.05	0282 204	76.00
▪		300	12	150	6	0.05	0282 205	83.00
▪		400	16	150	6	0.05	0282 206	93.00
▪		500	20	150	6	0.05	0282 207	128.00
▪		500	20	250	10	0.05	0282 208	197.00
▪		800	31	250	10	0.05	0282 209	325.00
▪		1000	39	250	10	0.05	0282 210	462.00
	▪	1500	59	300	12	0.05	0282 212	1,128.00
	▪	2000	79	300	12	0.05	0282 213	1,482.00
Stainless steel, vernier + scale satin chrome finished								
▪		150	6	100	4	0.05	0282 501	72.00
▪		200	8	100	4	0.05	0282 502	76.00
▪		300	12	100	4	0.05	0282 503	86.00
▪		250	10	130	5	0.05	0282 504	83.00
▪		300	12	150	6	0.05	0282 505	91.00
▪		500	20	150	6	0.05	0282 507	141.00
▪		500	20	250	10	0.05	0282 508	215.00
▪		800	31	250	10	0.05	0282 509	357.00
▪		1000	39	250	10	0.05	0282 510	506.00

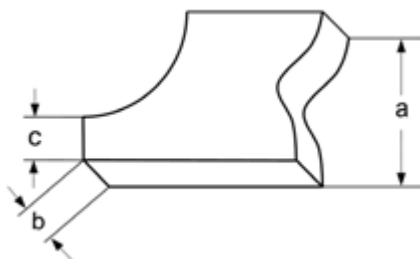

Measuring range mm	Dimension mm		
	a	b	c
150 - 200	8.0	3.0	3.5
250 - 500	12.0	4.0	4.0
500 - 1000	20.0	5.0	10.0
1500	25.0	6.0	13.0
2000	30.0	7.0	13.0



0286 Vernier depth gauges




Specification

- DIN 862
- Locking screw
- Reversible, L shaped measuring rod
- Scales on both sides
- Low-set master scale
- High-precision laser graduation on the vernier and scale

Shipment


- Cardboard box for calipers up to 1000 mm, larger measuring ranges are individually packed

**DIN
862**

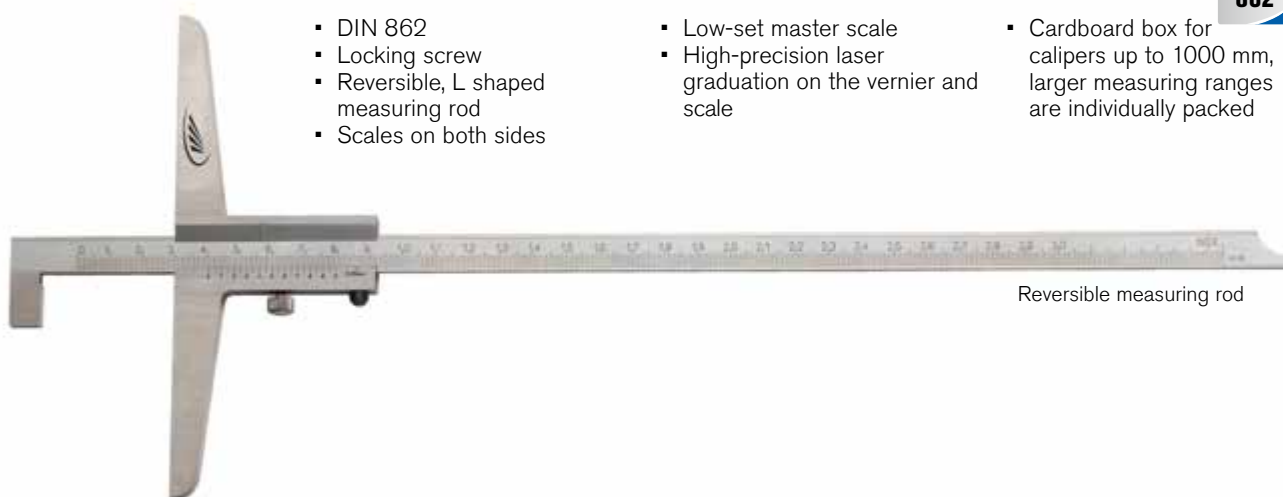

Reversible measuring rod

		Measuring range		Base length		Reading mm	Ref. No.	List price Euro
		mm	inch	mm	inch			
Stainless steel, vernier satin chrome finished								
▪		150	6	100	4	0.05	0286 201	79.00
▪		200	8	100	4	0.05	0286 202	81.00
▪		250	10	130	5	0.05	0286 204	91.00
▪		300	12	150	6	0.05	0286 205	98.00
▪		400	16	150	6	0.05	0286 206	121.00
▪		500	20	150	6	0.05	0286 207	154.00
▪		500	20	250	10	0.05	0286 208	258.00
▪		800	31	250	10	0.05	0286 209	404.00
▪		1000	39	250	10	0.05	0286 210	561.00
	▪	1500	59	300	12	0.05	0286 212	1,212.00
	▪	2000	79	300	12	0.05	0286 213	1,562.00
Stainless steel, vernier + scale satin chrome finished								
▪		150	6	100	4	0.05	0286 501	86.00
▪		200	8	100	4	0.05	0286 502	87.00
▪		250	10	130	5	0.05	0286 504	100.00
▪		300	12	150	6	0.05	0286 505	106.00
▪		500	20	150	6	0.05	0286 507	170.00
▪		500	20	250	10	0.05	0286 508	358.00
▪		800	31	250	10	0.05	0286 509	483.00
▪		1000	39	250	10	0.05	0286 510	615.00

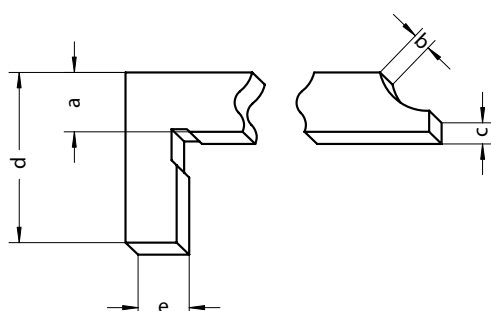


Meas. range mm	a	b	c	d	e
150 - 200	8	3	3.5	20	5
250 - 500	12	4	4	28	10
500 - 1000	20	5	10	70	19
1500	25	6	10	90	24
2000	30	7	10	90	29



HELIOS • PREISSER

0292 Offset vernier depth gauges




Specification

- Stainless steel
- Reading parts have a satin chrome finish
- Factory standard
- Locking screw
- Reversible, offset meas. rod
- Low-set master scale
- Scales on both sides
- High-precision laser graduation on the vernier and scale

Shipment

- Cardboard box

1

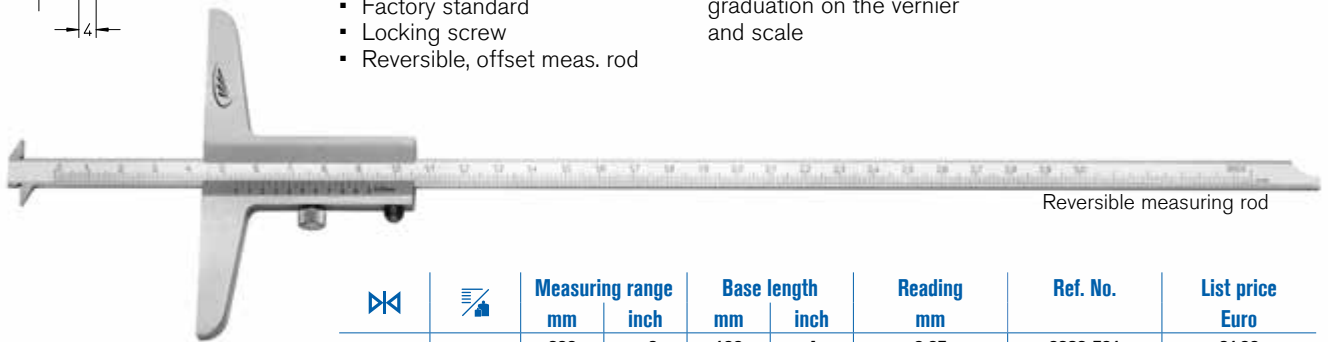

Reversible measuring rod

		Measuring range		Base length		Reading	Ref. No.	List price
		mm	inch	mm	inch	mm		Euro
		200	8	100	4	0,05	0292 501	81.00
		300	12	100	4	0,05	0292 502	92.00

0294 Vernier depth gauges with sliding measuring base




Specification

- Stainless steel
- Reading parts have a satin chrome finish
- Factory standard
- Locking screw
- Sliding measuring base
- With measuring plate and pin for width and distance measurements
- Low-set master scale
- Scales on both sides
- High-precision laser graduation on the vernier and scale



Shipment

- Wooden case

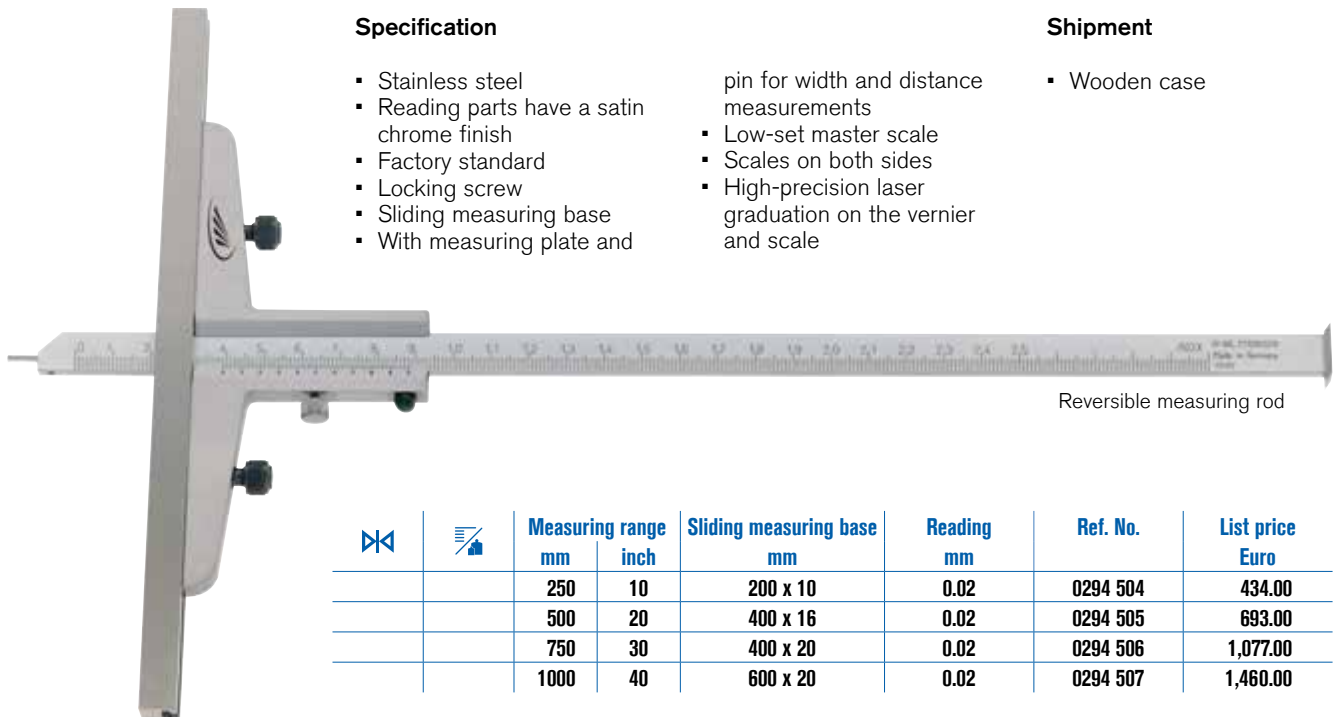

Reversible measuring rod


		Measuring range		Sliding measuring base	Reading	Ref. No.	List price
		mm	inch	mm	mm		Euro
		250	10	200 x 10	0.02	0294 504	434.00
		500	20	400 x 16	0.02	0294 505	693.00
		750	30	400 x 20	0.02	0294 506	1,077.00
		1000	40	600 x 20	0.02	0294 507	1,460.00



Meas. range mm	a	b	c	d	e	f	g
250 - 500	12	4	18	6	2	2	8
750 - 1000	20	5	30	8	3	3	8



1360 DIGI-MET® Depth gauges

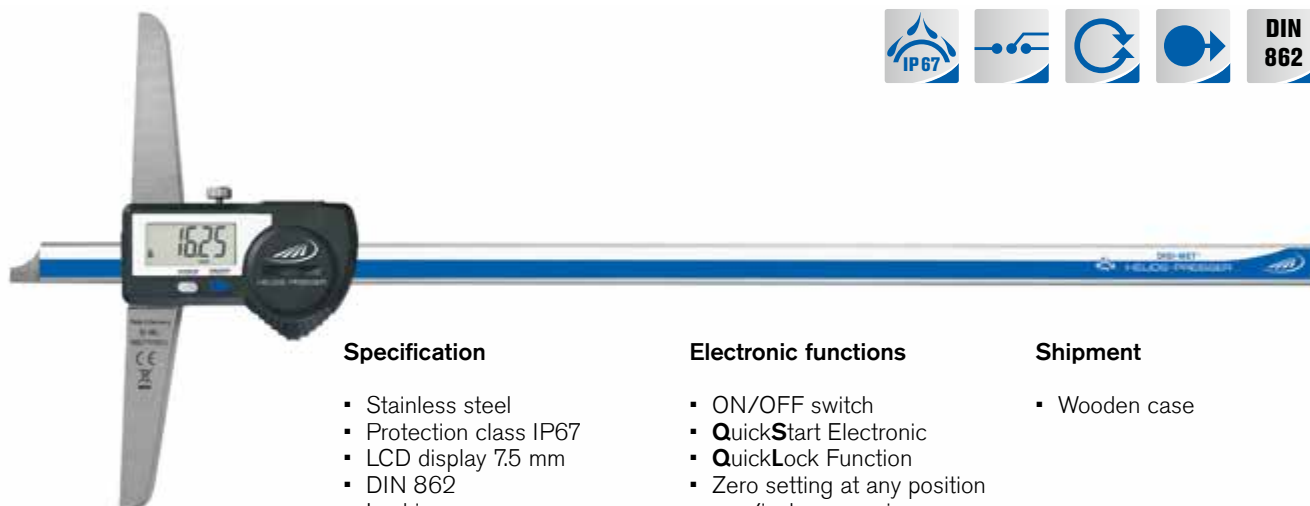

Specification

- Stainless steel
- Protection class IP67
- LCD display 7.5 mm
- DIN 862
- Locking screw
- Straight measuring rod

Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output
RS 232 + Digimatic + USB

Shipment

- Wooden case

		Measuring range		Base length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		150	6	100	4	0.01	.005	1360 716	304.00
		200	8	100	4	0.01	.0005	1360 718	345.00
		300	12	150	6	0.01	.0005	1360 722	387.00
		500	20	150	6	0.01	.0005	1360 728	445.00
		1000	39	250	10	0.01	.0005	1360 734	1,266.00
	▪	1500*	59	250	10	0.01	.0005	1360 738	1,931.00
	▪	2000*	80	250	10	0.01	.0005	1360 740	2,292.00

* Factory standard

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00






HELIOS • PREISSER

1362 DIGI-MET® Depth gauges



1

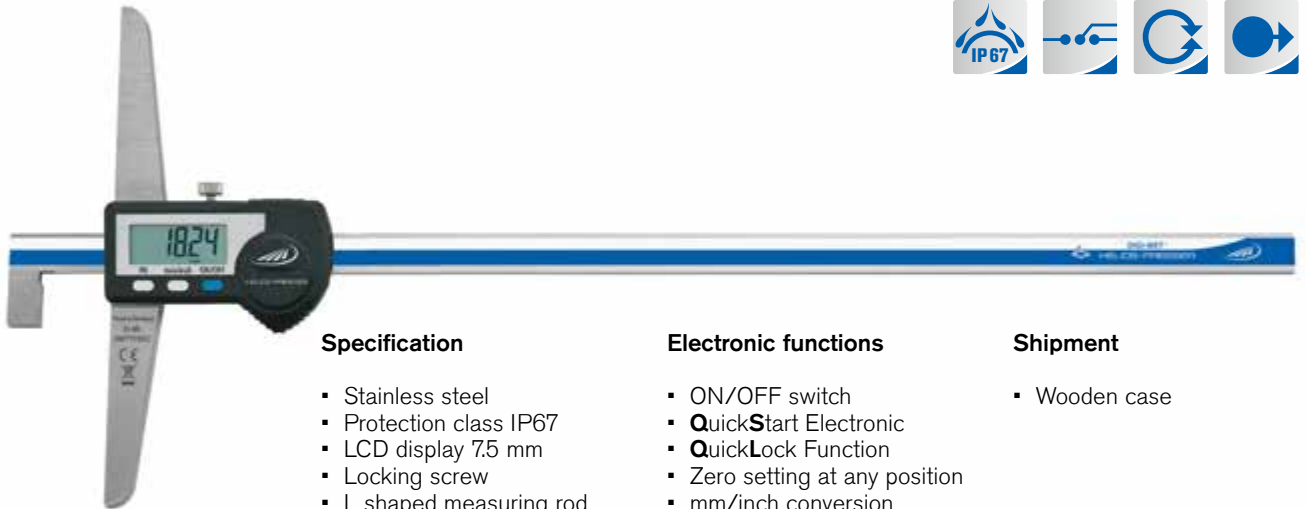

Specification

- Stainless steel
- Protection class IP67
- LCD display 7.5 mm
- Locking screw
- L shaped measuring rod
- Larger measuring ranges are available upon request
- Factory standard


Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET function (setting numerical value)

Shipment

- Wooden case

		Measuring range		Base length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
▪		300	12	150	6	0.01	.0005	1362 722	397.00
▪		500	20	150	6	0.01	.0005	1362 728	461.00



Accessories


	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for Opto to RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1364 DIGI-MET® Depth gauges



**DIN
862**

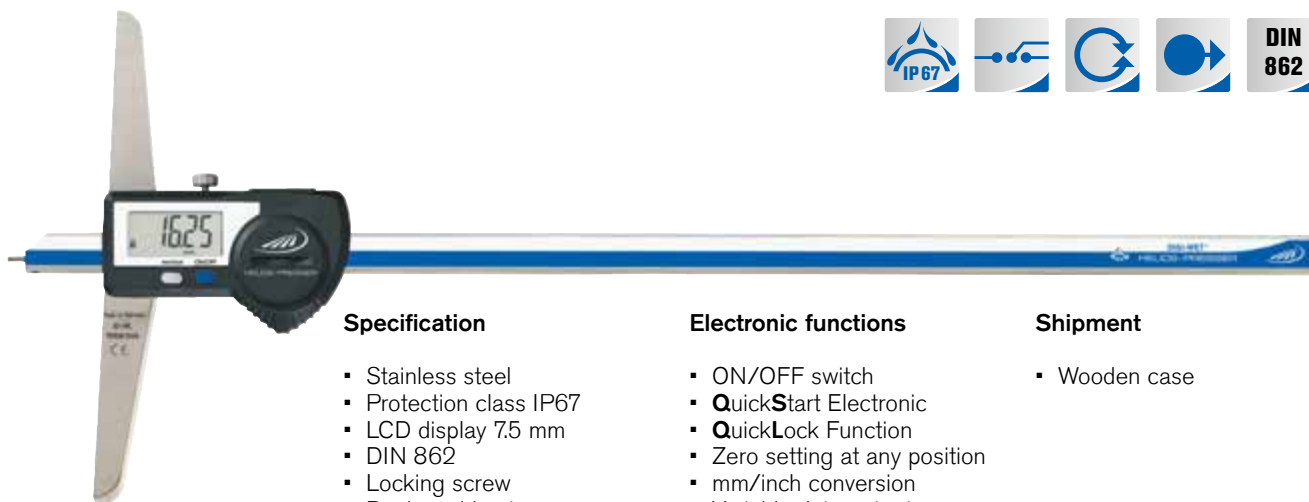

Specification

- Stainless steel
- Protection class IP67
- LCD display 7.5 mm
- DIN 862
- Locking screw
- Replaceable pin, dia. 2 x 5 mm
- Larger measuring ranges are available upon request

Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output
RS 232 + Digimatic + USB

Shipment

- Wooden case

		Measuring range		Base length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
▪		200	8	100	6	0.01	.0005	1364 722	375.00
▪		300	12	150	6	0.01	.0005	1364 728	418.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00

Replacement measuring



	Ref. No.	List price Euro
	0276 711	5.90



1371 DIGI-MET® Depth gauges



1



Specification

- Stainless steel
- Inductive measuring system, protection class IP67
- DIN 862
- Locking screw
- LCD display 11 mm
- Measuring pin dia. 1.5 mm


Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- PRESET Function (setting a numerical value)

Shipment

- Wooden case

		Measuring range		Base length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
▪		150	6	100	4	0.01	.0005	1371 416	358.00
▪		300	12	150	6	0.01	.0005	1371 422	439.00
▪		500	20	150	6	0.01	.0005	1371 428	505.00

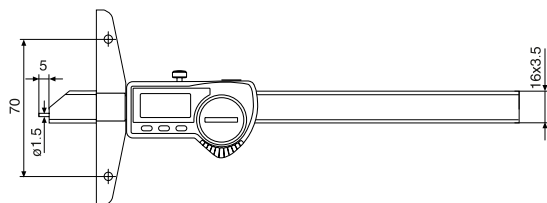

Accessories

Battery, 3V-Lithium, CR 2032


Ref. No.

0220 704

List price
Euro


3.60

Extension depth attachment base

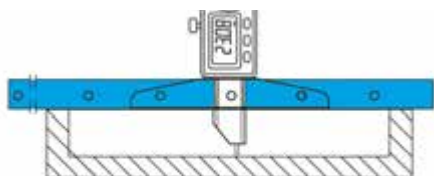

		Depth attachment base length mm	Ref. No.	List price Euro
		200	1271 451	82.00
		300	1271 452	95.00

Measuring insert for distance measurements




- To be attached to the measuring pin

		Ref. No.	List price Euro
		1271 455	55.00



1368 DIGI-MET® Depth gauges

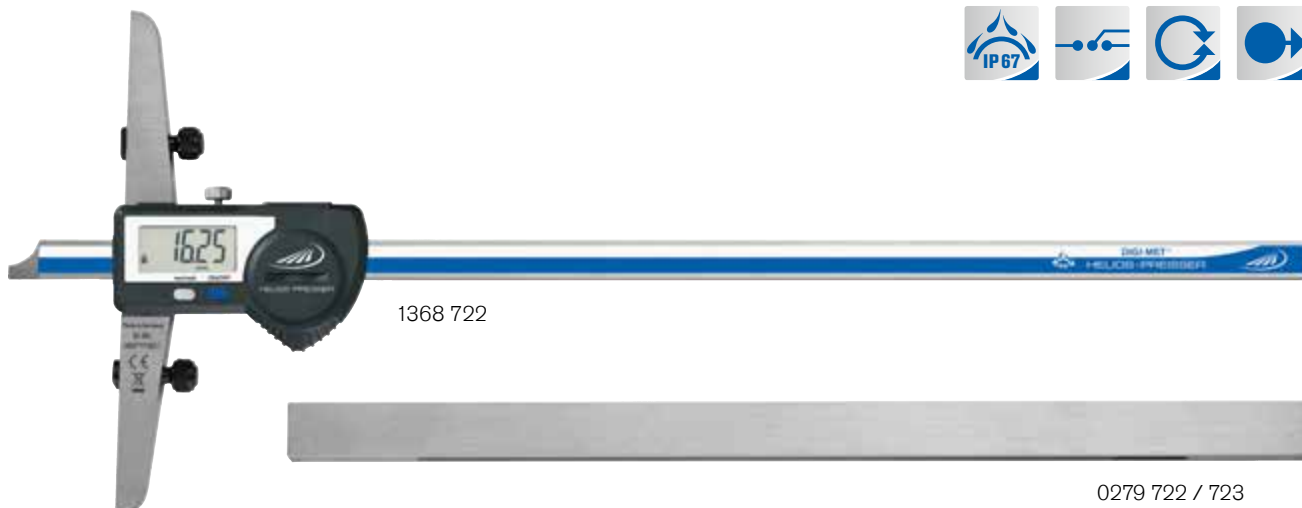

1368 722

0279 722 / 723

Specification

- Stainless steel
- Inductive measuring system, protection class IP67
- LCD display 7.5 mm
- Locking screw
- The sliding measuring base must be ordered separately

Electronic functions

- ON/OFF switch
- QuickStart** Electronic
- QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB

Shipment

- Wooden case
- Without sliding measuring bridge (optional)

		Measuring range		Base length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		300	12	150	6	0.01	.0005	1368 722	397.00
		500	20	150	6	0.01	.0005	1368 728	451.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00

Sliding measuring base, stainless steel




		Dimensions mm	Ref. No.	List price Euro
		300 x 16	0279 722	251.00
		400 x 16	0279 723	263.00



HELIOS • PREISSER

1366 DIGI-MET® Offset depth gauge

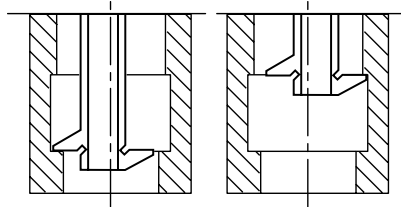

1

Specification

- Stainless steel
- Inductive measuring system, protection class IP67
- LCD display 7.5 mm
- Factory standard
- Housing and operating keys have an excellent chemical resistance
- Locking screw

Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB

Shipment

- Wooden case


		Measuring range		Base length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
▪		200	8	100	4	0.01	.0005	1366 718	390.00
▪		300	12	150	6	0.01	.0005	1366 722	471.00
▪		500	20	150	6	0.01	.0005	1366 728	593.00

Accessories


	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1379 DIGI-MET® Depth gauges with interchangeable inserts

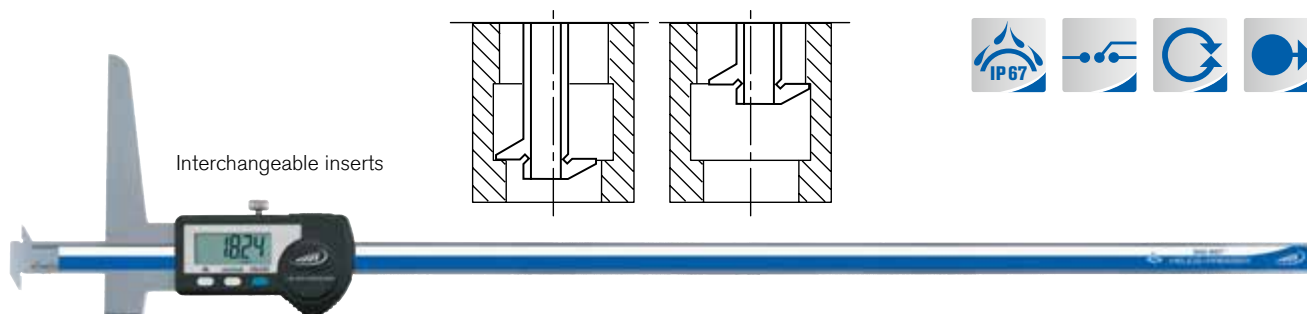

Interchangeable inserts

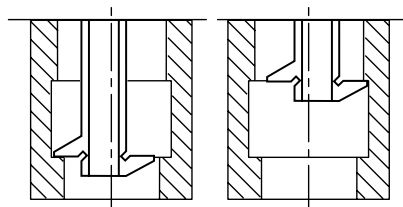

Specification


- Interchangeable inserts for solving different measuring tasks
- Measuring base can be attached (optional, see accessories)
- Stainless steel
- Inductive measuring system, protection class IP67
- Factory standard

Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch-conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment


- * With insert for width and distance measurements
Ref. No. 1279 780
- Wooden case
- [More inserts and measuring base optional](#)



		Measuring range		Base length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
▪		300	12	150	6	0.01	.0005	1379 722	612.00
▪		500	20	150	6	0.01	.0005	1379 728	844.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00





HELIOS • PREISSER

1279 Interchangeable inserts made of stainless steel, hardened



1279 780*



1279 781



1279 782















1279 783



1279 784



1279 785



			Ref. No.	List price Euro
		Insert for width and distance measurements*	1279 780*	105.00
		Insert with ball, angled	1279 781	105.00
		Insert with ball, straight	1279 782	105.00
		Insert with measuring pin	1279 783	105.00
		Insert with hook	1279 784	105.00
		Insert with straight measuring rod	1279 785	105.00

* Standard insert included in the delivery of the basic instrument

Sliding measuring base made of stainless steel



		Dimensions mm	Ref. No.	List price Euro
		300 x 16	0279 722	251.00
		400 x 16	0279 723	263.00



1375 DIGI-MET® Small depth gauge



Specification

- Stainless steel
- Protection class IP67
- LCD display 7.5 mm
- Factory standard
- Measuring pin, dia. 2 mm

Shipment

- Wooden case

Electronic functions

- ON/OFF switch
- **QuickStart** Electronic
- **QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)



		Measuring range		Base length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		25	1	48	1.89	0.01	.0005	1375 502	230.00

Accessories

	Ref. No.	List price Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1376 DIGI-MET® Depth gauge



1

Specification

- Stainless steel
- LCD display 7.5 mm
- Locking screw
- Factory standard

Electronic functions


- ON/OFF switch
- QuickStart** Electronic
- QuickLock** Function
- Zero setting at any position
- mm/inch conversion
- Variable data output

Shipment


- Wooden case

- RS 232 + Digimatic + USB
- Reversal of counting direction
- PRESET Function (setting a numerical value)


Example of use



Measuring insert Ø 4 mm




Disc measuring insert

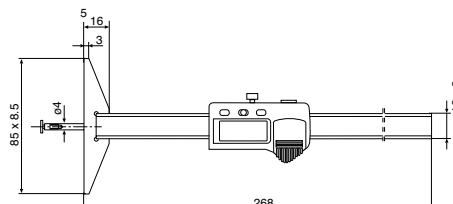

		Measuring range		Base length		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch	mm	inch		
		100	4	85	3.4	0.01	.0005	1376 514	477.00

Standard accessories

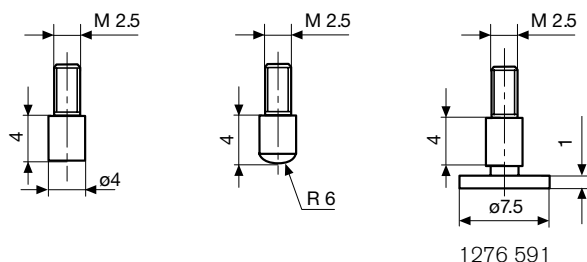

Accessories

	Ref. No.	List price Euro
Disc type measuring insert dia. 7.5 x 1 mm	1276 591	17.30
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for USB, incl. software	1998 720	66.00
Cable for RS 232	1997 501	46.20
Cable for Digimatic	1998 501	59.00



1378 DIGI-MET® Depth gauges for one-handed operation



Specification

- Stainless steel
- Inductive measuring system, protection class IP67
- Locking screw
- Factory standard
- Constant measuring force through spring pressure
- Measuring pin with thread M 2.5 for exchangeable measuring inserts for core hole bores, also compatible with dial gauge inserts (see No. 0710)
- Measuring inserts for **core hole bores** (for additional costs) see table

Electronic functions

- ON/OFF switch
- QuickStart Electronic
- QuickLock Function
- Zero setting at any position
- mm/inch conversion
- Variable data output RS 232 + Digimatic + USB
- PRESET Function (setting a numerical value)

Shipment


- Wooden case
- ball measuring inserts for depth measurement included

		Measuring range		Reading		Ref. No.	List price Euro
		mm	inch	mm	inch		
		0 - 60	0 - 2.4	0.01	.0005	1378 505	728.00
		0 - 100	0 - 4.0	0.01	.0005	1378 508	783.00


Measuring inserts for core hole bores

		Thread size mm	Core diameter mm	Measuring insert diameter mm	Ref. No.	List price Euro
		M 16 x 1.5	14.38	14.32	1278 923	26.00
		M 16 x 1	14.92	14.87	1278 924	26.00
		M 12 x 1.25	10.65	10.59	1278 936	26.00
		M 12 x 1	10.92	10.87	1278 938	26.00
		M 10 x 1	8.92	8.87	1278 940	26.00
		M 10 x 0.75	9.19	9.13	1278 942	26.00
		M 8 x 1	6.92	6.87	1278 944	26.00
		M 8 x 0.75	7.19	7.14	1278 946	26.00
		M 6 x 0.75	5.19	5.14	1278 948	26.00
		M 5 x 0.5	4.46	4.41	1278 950	26.00
		M 16	13.84	13.79	1278 952	26.00
		M 12	10.11	10.05	1278 954	26.00
		M 10	8.38	8.32	1278 956	26.00
		M 8	6.65	6.59	1278 958	26.00
		M 6	4.92	4.87	1278 960	26.00
		M 5	4.13	4.08	1278 962	26.00
		16 pieces - set			1278 930	381.00

Measuring inserts
for core hole bores



Reduction



Reductions for smaller surface contacts


Type	Dim. A mm	Dim. B mm	Ref. No.	List price Euro
6/12	dia. 6	dia. 12	1278 912	105.00
9.5/16	dia. 9.5	dia. 16	1278 916	105.00
15/20	dia. 15	dia. 20	1278 920	105.00



0273 DIGI-MET® Mounting scales



1

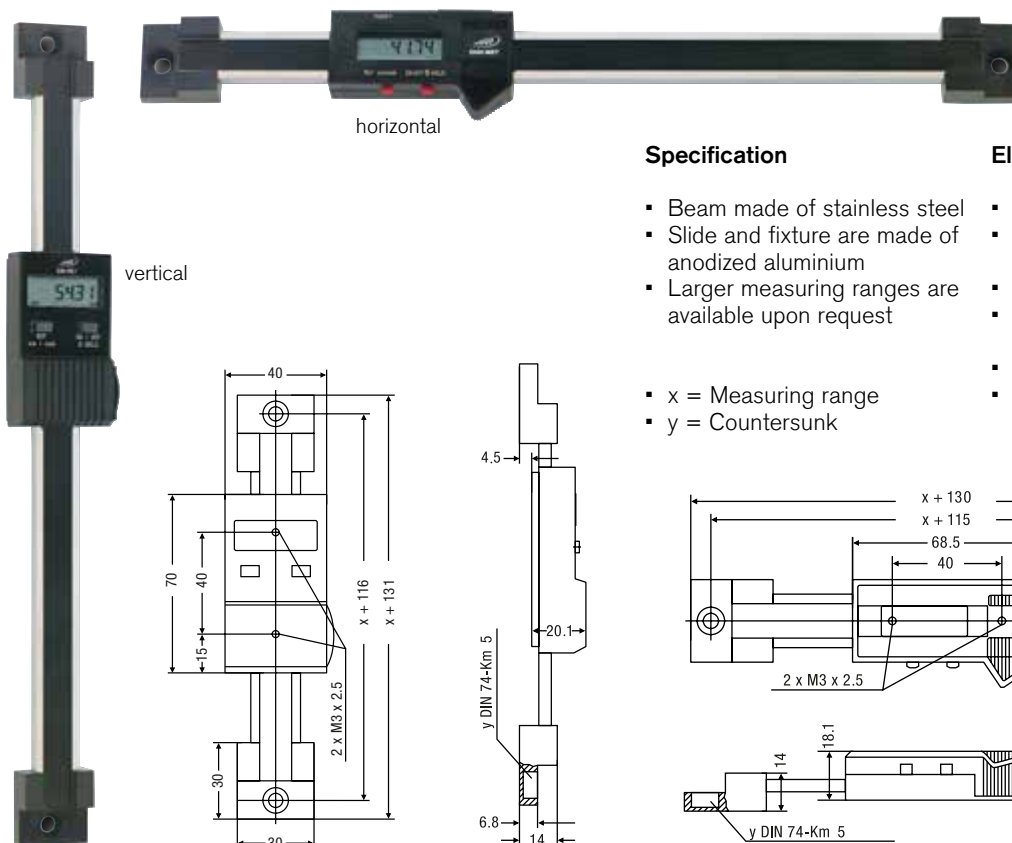

Specification

- Beam made of stainless steel
- Slide and fixture are made of anodized aluminium
- Larger measuring ranges are available upon request

- x = Measuring range
- y = Countersunk

Electronic functions

- ON/OFF switch
- Zero setting at any position
- mm/inch conversion
- Data output Opto RS 232
- Hold Function
- PRESET Function (setting a numerical value)

		Measuring range		LCD display mm	Reading		Ref. No.	List price Euro
		mm	inch		mm	mm		
Horizontal								
		150	6	6	0.01	.0005	0273 731	190.00
		200	8	6	0.01	.0005	0273 732	195.00
		300	12	6	0.01	.0005	0273 735	200.00
		450	18	6	0.01	.0005	0273 738	224.00
		600	24	6	0.01	.0005	0273 741	272.00
		800	31	6	0.01	.0005	0273 745	476.00
		1000	39	6	0.01	.0005	0273 746	519.00
Vertical								
		150	6	6	0.01	.0005	0273 751	340.00
		200	8	6	0.01	.0005	0273 752	345.00
		300	12	6	0.01	.0005	0273 755	350.00
		450	18	6	0.01	.0005	0273 758	368.00
		600	24	6	0.01	.0005	0273 761	414.00
		800	31	6	0.01	.0005	0273 765	581.00
		1000	39	6	0.01	.0005	0273 766	625.00

Accessories

	Ref. No.	List price
		Euro
Battery, 3V-Lithium, CR 2032	0220 704	3.60
Cable for Opto to RS 232	0996 701	71.00
Cable for Opto to USB	0996 705	136.00
USB-keyboard interface cable Opto RS 232	0997 770	232.00



0003 Wooden cases with foam padding



Standard packaging:
Cardboard box with
cutout insert

		Measuring range mm	Jaw length mm	Internal dimensions L x B x H mm	Ref. No.	List price Euro
For calipers with knife points						
		160	40	250 x 90 x 20	0003 219	7.10
		200	80	315 x 130 x 20	0003 220	8.50
		250	80	370 x 145 x 20	0003 221	10.70
		300	90	435 x 175 x 20	0003 222	14.80
		400	125	590 x 220 x 20	0003 225	32.40
		400	150	590 x 250 x 20	0003 226	38.70
		400	200	590 x 300 x 20	0003 227	35.40
		500	150	690 x 250 x 21	0003 229	44.30
		500	200	700 x 315 x 21	0003 230	45.40
		500	250	700 x 350 x 21	0003 231	46.40
		600	150	790 x 250 x 21	0003 233	56.00
		600	200	790 x 300 x 21	0003 234	62.00
		800	150	1000 x 270 x 21	0003 237	61.00
		800	200	1000 x 320 x 21	0003 238	62.00
		800	300	1000 x 420 x 21	0003 240	80.00
		1000	150	1200 x 270 x 21	0003 243	81.00
		1000	200	1200 x 320 x 21	0003 244	91.00
		1000	300	1230 x 420 x 21	0003 246	109.00
		1250	200	1520 x 380 x 25	0003 249	106.00
		1250	300	1520 x 440 x 25	0003 250	135.00
		1500	200	1800 x 380 x 25	0003 252	152.00
		1500	300	1800 x 440 x 25	0003 253	181.00
		2000	200	2300 x 380 x 25	0003 255	278.00
		2000	300	2300 x 460 x 25	0003 256	263.00
		3000	200	3310 x 400 x 25	0003 258	294.00
		3000	300	3310 x 460 x 25	0003 259	340.00





HELIOS • PREISSER

0003 Wooden cases with foam padding



		Measuring range mm	Jaw length mm	Internal dimensions L x B x H mm	Ref. No.	List price Euro
For calipers without knife points						
		160	40	250 x 90 x 20	0003 219	7.10
		200	80	315 x 130 x 20	0003 220	8.50
		250	80	370 x 145 x 20	0003 221	10.70
		300	90	435 x 175 x 20	0003 222	14.80
		300	150	435 x 205 x 20	0003 223	16.60
		400	125	610 x 180 x 20	0003 224	24.90
		400	150	590 x 220 x 20	0003 225	32.40
		400	200	590 x 250 x 20	0003 226	38.70
		500	150	690 x 200 x 20	0003 228	43.10
		500	200	690 x 250 x 21	0003 229	44.30
		500	250	700 x 315 x 21	0003 230	45.40
		600	150	790 x 200 x 21	0003 232	46.40
		600	200	790 x 250 x 21	0003 233	56.00
		600	300	810 x 400 x 21	0003 235	67.00
		800	150	1000 x 220 x 21	0003 236	57.00
		800	200	1000 x 270 x 21	0003 237	61.00
		800	300	1000 x 380 x 21	0003 239	69.00
		800	400	1100 x 480 x 21	0003 241	80.00
		1000	150	1200 x 220 x 21	0003 242	76.00
		1000	200	1200 x 270 x 21	0003 243	81.00
		1000	300	1200 x 380 x 21	0003 245	101.00
		1000	500	1300 x 600 x 25	0003 247	125.00
		1250	200	1520 x 310 x 25	0003 248	106.00
		1250	300	1520 x 380 x 25	0003 249	106.00
		1500	200	1800 x 310 x 25	0003 251	141.00
		1500	300	1800 x 380 x 25	0003 252	152.00
		2000	200	2300 x 310 x 25	0003 254	236.00
		2000	300	2300 x 380 x 25	0003 255	278.00
		3000	200	3310 x 310 x 25	0003 257	283.00
		3000	300	3310 x 400 x 25	0003 258	294.00

1